

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 November 2001 (22.11.2001)

PCT

(10) International Publication Number  
WO 01/89127 A2

(51) International Patent Classification<sup>7</sup>: H04J 14/00

(21) International Application Number: PCT/US01/15769

(22) International Filing Date: 15 May 2001 (15.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/204,165 15 May 2000 (15.05.2000) US

(71) Applicant: CORNING INCORPORATED [US/US]; 1  
Riverfront Plaza, Corning, NY 14831 (US).

(72) Inventors: ANTONIADES, Neophytos; 416 Hillside  
Avenue, Leonia, NJ 07605 (US). BOSKOVIC, Alek-  
sandra; 90 Forest Glen Drive, Highland Park, NJ 08904  
(US). BUCKLAND, Eric, L.; 112 Mariners Point Lane,  
Hickory, NC 28601 (US). BUTLER, Douglas, L.; 25  
Katie Lane, Painted Post, NY 14870 (US). LI, Ming-Jun;

10 Ambrose Drive, Horseheads, NY 14845 (US). MCNA-  
MARA, Thomas, W.; 400 West Third Street, Corning,  
NY 14830 (US). PASTEL, David, A.; 623 Hibbard Road,  
Horseheads, NY 14845 (US). SHARMA, Manish; 13  
Petunia Drive, Apt. #2H, North Brunswick, NJ 08902  
(US). SOULLIERE, Mark, J.; 276 Wall Street, Corning,  
NY 14830 (US). YADLOWSKY, Michael, J.; 19 East  
Fifth Street, Corning, NY 14830 (US).


(74) Agent: BEAN, Gregory, V.; Corning Incorporated, SP TI  
3 - 1, Corning, NY 14831 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

[Continued on next page]

(54) Title: OPTICAL NETWORKING DEVICES AND METHODS FOR OPTICAL NETWORKS WITH INCREASED TRANSPARENCY

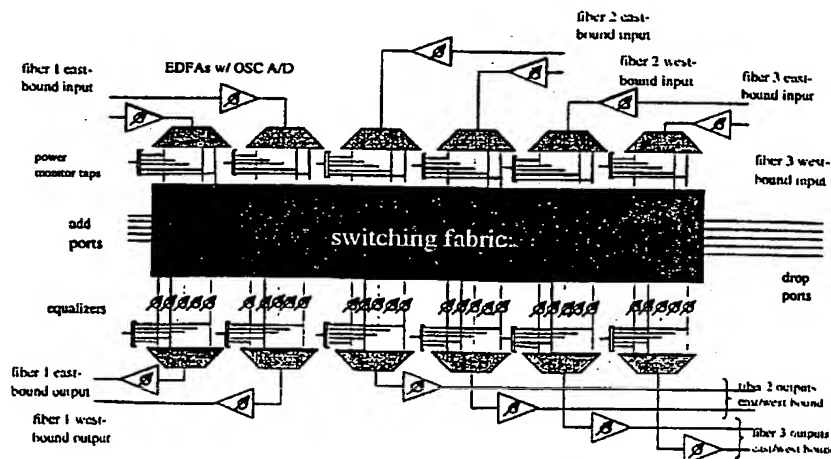

(57) Abstract: A wavelength selective optical cross-connect includes a first demultiplexor feeding into individually removable modules that in turn feed a first multiplexor, such that the cross-connect is expandable and repairable on a wavelength or waveband basis. The modules desirably include multiple optical components in the optical path, with components in each module matched to others in that module to provide module-to-module variation below that of the variation in module components. The modules desirably include an additional demultiplexor and multiplexor. The modules also desirably include wavelength or narrowband amplification together with power equalization. The modules may also include a switch fabric. Alternatively, the switch fabric may be provided in the form of a separate removable switch module or modules, with various technologies employed in various switch modules, including manual switching with automatic connection discovery, with simple plug-in upgradeability to modules having automatic or remotely actuated switching.

WO 01/89127 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Optical Networking Devices and Methods**  
**for Optical Networks With Increased Transparency**

5           This application claims the benefit of priority of the disclosure of U.S. Provisional Application No. 60/204,165, filed 15 May 2000, which is hereby incorporated herein by reference.

**FIELD OF THE INVENTION**

10           This invention relates to devices and methods for use in optical communications networks and particularly to devices for use in optical networks having increased transparency, that is, increased distances over which the communication signals remain in optical form.

**BACKGROUND OF THE INVENTION**

15           With explosion of demand for telecommunications bandwidth, the desirability of increasing the functionality and performance of the optical portion of the communications infrastructure has become well known. Increasing the transparency of optical networks can provide several benefits, including decreased costs, improved  
20   performance and upgradability, and increased flexibility for traffic management, protection (reliability), and provisioning.

          Optical fibers are frequently deployed in functional rings so that each node on the ring has at least two paths in or out. The rings, which provide path diversity for

increased resistance to fiber cuts, are typically deployed in pairs allowing full duplex traffic. Wavelength selective cross-connects (WSXCs) can be used to interconnect one

or more pairs of rings and further generate more complex network topologies with mesh or partial mesh connectivity, as shown in Figure 1. A WSXC demultiplexes the wavelength channels carried on the input fibers, typically amplifies or regenerates them, then routes and multiplexes the signals destined for the same output fiber.

5 A WSXC consists of a large number of different optical components. Cost-effective provisioning and control of the various components is needed, particularly while maximizing optical signal quality and minimizing loss.

## SUMMARY OF THE INVENTION

### BRIEF DESCRIPTION OF THE DRAWINGS

### DESCRIPTION OF THE INVENTION

15 The generic optical components/functionality of a WSXC according to the present invention are shown in schematically in Figure 2. As shown in Figure 2, there are a large number of electronic and software components which are responsible for powering, controlling and managing the operation of the system and communicating with the next higher level of the network management system. The control function  
20 consists of dedicated electronics and perhaps embedded control software that actuate, monitor and/or stabilize the optical components. The management function is provided by a combination of electronic hardware and software that can perform local management of the control function (verifying functionality, fault recovery etc.) and can communicate with the network management system (NMS), providing both status  
25 information and executing state changes requested by the NMS or its subsidiaries.

The switching fabric can be considered in many ways to be the core of the WSXC since it performs the routing function. It is also currently the most immature technology of the main components in a WSXC. Indeed the deployment of wavelength routed networks is largely delayed by the lack of large, high performance, cost effective  
30 switching fabrics. And even as larger switch fabrics become increasingly available, there will be continued pressure to keep prices down.

One way to get the interconnect/routing functionality of a WSXC without employing remotely configurable switching fabrics such as MEMs, thermo-optic and free space deflected beam techniques (with the associated cost and performance issues) is to use a manual switching fabric. A manual switching fabric is based on a patch panel (connectors terminating fibers mounted on a panel which can be routed with connectorized patch cords) and can employ "connection discovery" features.

Connection discovery refers to a method by which the connections implemented by a fiber patch panel can be determined by a control system which resides, at least in part, within the patch panel itself. A variety of techniques could be used to determine the connectivity of the patch panel. For example, a wire, placed within the fiber patch cord, could be terminated on the fiber connectors. The fiber connectors on the patch panel would make electrical connection with the patch cord and conduct electronic communications across the wire to determine the implemented connection. For electronic communications to occur, one side of the patch panel would have to generate a signal coded to indicate the identity of the source connector (e.g. using a digital baseband signal, a specific frequency, etc.). Another method would be to use a duplex fiber connector for each single fiber connection. One of the fibers of the duplex patch cord could be used for the traffic-bearing signal and the other could be used for carrying a signal (e.g. from a low cost LED) from one side of the patch panel to the other. This auxiliary signal could be used for the purpose of determining the connectivity implemented in the manner of the electronic communication listed above.

While patch panels are widely used to route signals within switching offices, typically, they have not been used to determine wavelength routing in WDM networks. One reason for this is the difficulty in determining where the signal has been routed, and keeping the network management system aware of this information. The present invention solves this problem by adding connection discovery to the patch panel (this combination will be referred to as a manual switching fabric) and using the result to route wavelength signals in a WSXC. Thus one example embodiment of the current invention combines the use of a manual switching fabric and other optical components of the cross connect (i.e.- some combination or subset of wavelength demultiplexors, optical amplifiers, optical power monitors, channel power equalizers, etc.) with

electronic control and management functionality, along with a software-mediated interface to the network management system.

For many applications, a manual switching fabric may not provide all of the functionality desired. In particular, the remote configurability offered by many optical switching technologies has the potential to speed up the provisioning rate of new connections in a network. Thus another example embodiment of the present invention includes, as a feature of a cross connect, upgrade capability for the switching fabric technology from a low cost manual switch fabric to a remotely configurable one (or more generally, the capability to choose among different switch fabric technologies for use within the cross connect). This upgrade or technology-choice capability can be implemented on a wavelength-by-wavelength basis, all wavelengths at once, or for pre-defined groups (bands) of wavelength channels. The first and last options allow the cross connect to have a switch fabric responsible for routing signals which fabric consists of both manual and remotely configurable modules. The switching technology in the modules can likewise be based on a mixture of different technologies. Modules of one technology can be interchangeable with modules of a different technology.

There are two major benefits of building a cross-connect or WSXC using a modular/upgradeable switch fabric as discussed here. First, it would allow the user of the device to choose among multiple technology options for each wavelength or band. Second, a single basic WSXC design can be used for a wide variety of applications.

The switch fabrics needed for crossconnects with low connectivity (a small total number of fiber going in and out, such as might be encountered where only two rings are being interconnected) are naturally much smaller than those needed for high connectivity nodes (where a large number of rings are interconnected). The value of both is these is primarily driven by cost. Currently the cost of a remotely configurable switch fabric significantly exceeds that of the manual switch fabric. Furthermore, the cost of a remotely configurable switch fabric typically increases rapidly with size. Therefore, with the crossconnect presented here, a carrier could first employ a manual switch fabric in order to enjoy the cost savings of using a transparent network and get most of the functionality of a WSCX without having to pay for an expensive remotely configurable switch fabric. As the price of remotely configurable fabrics decreases or traffic patterns change (for example, as churn becomes an issue for wavelength



services), the manual switch fabric can be upgraded to a remotely configurable switch fabric based on the appropriate technology. Furthermore, by allowing the upgrade to be done on single wavelengths or bands consisting of less than the total number of wavelengths carried by the fiber, this upgrade can be done with minimal impact on existing traffic.

One way to construct a crossconnect according to an example embodiment of the present invention is to separate the switching function to individual 'wavelength planes.' Since transparent crossconnects do not have inherent wavelength conversion capability, there is no need to be able to route a particular wavelength to the multiplexer port of any other wavelength. Once a means of grouping like wavelengths is implemented, a modular switch fabric construction can be used. In order to facilitate upgrade of the switch fabric, the wavelength-plane switch modules can be connectorized to facilitate their deployment as needed and/or their upgrade to another switch fabric technology.

Wavelength conversion, if desired, can be implemented using opto-electronic transponders in a WSXC that has add/drop capability on each wavelength by dropping a signal, changing wavelength with the transponder, and then adding the new signal.

Some of the significant features of these examples of the invention include: (1) a WSXC with manual switch fabric patch panel with connection discovery for wavelength routing; (2) a WSXC with a switch fabric that is replaceable, and deployable and upgradeable, wavelength-by-wavelength or band-by-band; (3) a WSXC in which the routing of different wavelengths uses different switch fabric technologies (including a manual switch fabric, for example); and (4) a manual switch fabric which has a controller or other interface which can communicate with the element/network management system and convey information regarding signal routing

In order to facilitate the modularity of the cross-connect design, the entire system can be divided into several key units. The first unit, the optical transport section (OTS) or optical multiplex section (OMS), strips the overhead supervisory channel out from the incoming signal(s) and demultiplexes the signal into individual wavelength channels. It also can provide independent ring protection allowing the system to tolerate protection switches on each ring. An optical power equalizer can be used before the multiplexers that recombine the individual wavelength channels for eventual

transport to the next network node. Figure 3 shows an example rack layout for an example OMS section (in the form of an OMS shelf) of the crossconnect for use in both the C- and L-bands, as well as the components necessary for converting the OTS into an OMS.

5 In Figure 3, the OTS signal enters a band-splitting filter (BSF), which removes the optical supervisory channel (OSC). The OSC is used for control, messaging, and alarming between nodes. The remainder of the signal (the OMS signal) may connect (via either a backplane or front panel connection) to an optional dispersion  
10 compensation module (DCM), and then back to the BSF module. This allows the dispersion to be compensated for the entire OMS. Alternatively, narrower band dispersion compensation can be performed later, after the signal has been split into smaller wavelength groups (called bands) in modules such as the EDFAs. The OMS can be split into two or more wavelength bands to aid amplification. In the present example, two bands are used: the C-band (approximately 1530 – 1560 nm) and the L-  
15 band (approximately 1565 – 1605 nm). The two signal groups are routed to appropriate amplifier modules via backplane connections. The amplifiers boost the signal power and then the signals connect through the backplane to the demultiplexor/multiplexor (DEMUX/MUX) modules.

The demultiplexing portion of these modules separates the two bands into even  
20 finer wavelength bands which, in this example, consist of 4 wavelengths. If a banded wavelength structure such as this example is used, then the demultiplexor can be composed of a cascade of smaller demultiplexors, where the first one separates the signal into several wavelength bands, and the second set of demultiplexors further separate each band into its constituent wavelengths. Figure 4 shows a rough schematic  
25 for a banded DEMUX or MUX module consisting of a maximum of 4 bands, where only 3 of the 4 bands are currently populated. The demultiplexor for each band is individually removable. This banded module approach has the advantage that only the demultiplexors for the bands used are initially purchased and deployed. When additional bands are added to the system, the demultiplexors are added to the module  
30 without disturbing any of the current connections. Note that any band structure can be used—i.e., both the number of wavelengths in a band and the number of bands can

change, and the DEMUX/MUX module can still be structured in a similar modular fashion.

5 An alternative to a banded demultiplexor is to have all the wavelengths demultiplexed at the same time. This has a higher initial cost if the not all the wavelengths are going to be used in the system. The module would then be a monolithic demultiplexor, and in the example shown in Figure 4, the system would have 16 output channels. As new wavelengths were added, additional connections could be made to the module without disturbing the existing traffic.

10 The individual channels can be connected either to a protection switch module if independent ring protection is desired, or directly to a wavelength interconnect/routing module, called the "shuffle shelf" module.

An example embodiment of a protection switch module includes a head-end splitter (HESP) and a tail-end switch (TES) is shown schematically in Figure 5. For protection switching, two modules (one from East and one from West) are connected in the fashion shown in Figure 5. The inputs to the protection switch modules are the signals from the East and West wavelength channels, and the outputs are connected to the East and West "shuffle shelf" modules.

Figure 6 shows a schematic that functionally indicates how the protection switches may be connected to each other and to the switching fabric. Note that the shuffle shelf is not shown here and also that the add/drop port optical protection is optional, depending on whether or not electrical protection switching is employed. The ring protection switches can also be mounted modularly, so that several switches plug into a motherboard module similar to the design used in the demultiplexor/multiplexor module. The protection switch modules shown in Figure 6 have four switches per module assuming four wavelengths per band, but that number could be dependent on the band structure used (if any).

The shuffle shelf serves to reorganize the all the signals from an OMS ring structure to a wavelength plane structure. For example, if the network topology had 6 fiber rings connected by the WSXC, and also employed 8 fiber bands with 4 wavelengths per band, then an example shuffle shelf would be as shown in Figure 7. In this example embodiment, the bulkhead connectors for the shuffle shelf module are array fiber connectors, and the signals in and out of the OMS ring are 4-fiber ribbon

cable (in general, for example, one fiber for each wavelength in the bands used in the DEMUX/MUX) and each carries a complete band for a particular ring. The signals traveling from the shuffle shelf to the switching fabric are 6-fiber ribbon cables (in general one fiber ribbon cable for each of the ring pairs which are being  
5 interconnected), where each carry the same wavelength, one fiber from each fiber ring. Thus, the switching fabric (manual or remotely reconfigurable) can perform the necessary routing functions and the signals return to the shuffle shelf to be reorganized back into a per ring basis.

The physical mechanism and function of the shuffle shelf can be performed by  
10 several different methods. For example, a flexible optical backplane could be employed, or several ribbon fiber fanouts spliced appropriately could be used. Note that the exact form of the shuffle shelf would vary depending on the wavelength band structure used, and would still be feasible even if no wavelength band structure was used. Also, the modularity of the shuffle shelf allows additional wavelengths to be  
15 added without disturbing existing traffic.

The manual switching fabric can also be arranged on a per wavelength or per band basis. Figure 8 shows one configuration for the manual switching fabric (MSF) for a 6-ring fiber network topology that groups the connections on a per wavelength basis. In the case where a band consists of 4 wavelengths, a single shelf provisions an  
20 entire band (both East and West). By arranging the MSF in this manner, all front plane jumper connections needed to route signals localized sections of the patch panel. This simplifies fiber routing considerably. Also, all of these connectors desirably have some form of connection discovery incorporated into them, so that all connections are verifiable by the network software agent, which is shown schematically on the diagram.  
25 The tributaries listed in Figure 8 are the local added and dropped wavelengths for the particular node in a ring.

This configuration allows for easy upgrade to a reconfigurable switching fabric (RSF) on a per wavelength or per band basis. For example, if a user wanted to upgrade a single wavelength to a RSF, then the system would temporarily be switched to  
30 protection ring and the fibers for the working ring would be routed to the RSF. Then the system would be switched back to working and the protection ring would be upgraded. Thus, a network system configuration could have some wavelengths or

bands employing a manual switch fabric while other wavelengths could use a remotely reconfigurable switch fabric.

Figure 9 shows an example schematic for a system with mixed types of switching fabrics. The network topology is 6 fiber rings, with the connections for a single 4 wavelength band being shown. Two of the wavelengths are routed through the MSF, while the other two are connected through two RSFs. Note that the switching technologies for the two RSFs do not have to be identical.

Following the signal path from the switching fabric(s), first, the signal returns to the shuffle shelf, and then back to the OMS shelves. Then, the signals can be connected to power equalization modules (PEQ) as needed on a per wavelength basis. The PEQ modules can also be modularly engineered so that several submodules independently plug into a motherboard. From the PEQ modules, the optical channel signals are routed to the multiplexor portion of the DEMUX/MUX module. The multiplexed signal connects via the backplane to the optical amplifiers, and then the C-band and L-band signals are recombined in the BSF. Lastly, in the BSF, the OSC signal is added to the OMS signal and the OTS leaves the WSXC.

#### Reducing the Complexity of Switch fabrics

By separating the functionality of the switching fabric and the protection switches, it is possible to reduce in the size of switching fabrics needed for certain connectivity requirements. Also, by limiting the types of inter-ring connections supported in the WSXC, additional reductions in the cost and size of the switching fabrics can be realized. For example, fast switches are needed only for protection in many applications. Switch fabrics for routing signals typically have to be large (compared to the minimum size for a ring protection switch) but can be slow, in many cases, including manual switch fabrics in which routing is done by moving fiber jumpers or patch cords. Also, separating protection switching and signal routing switching makes it possible to use redundant switch fabrics (for many applications) and thus avoid having a single point of failure within the cross-connect.

Take, for example, a WSXC for a WDM network system with independent ring protection (the ability to sustain protection switches on each ring traversed by a connection when using dedicated or 1:1 path protection). The network topology in this

example consists of 6 interconnected two-fiber rings (for a total of 12 simplex fibers). The WSXC also has the capability of locally adding and dropping any or all of the wavelengths in the system. By breaking up the system into wavelength planes, separating the routing (working) and the protection switches, and routing working and protection (or east and west) traffic to separate, redundant switches, only 2 12x12 switches are necessary per wavelength to provision this system. This design, which can be readily scaled to other sizes, is shown schematically in Figure 10. Note in Figure 10 that the functionality of the local (client) add/drop port optical protection may alternatively be supplied electrically.

One major advantage of separating the protection switching from the signal-routing fabric is the reduction in size of the requisite switch fabric. Another advantage arises because different requirements exist for the two functions performed. Protection switching requires relatively fast switches with response times on the order of 10 ms, whereas the switching fabric switch time can be up to two orders of magnitude slower. This allows different technologies to be employed in the two switching functions, and greatly relaxes the performance requirements of the switching fabric.

Switch fabrics of this size can be constructed out any number of technologies. Monolithic 2D technologies, such as MEMS or planar thermo-optic switches can provide these types of switches, or mechanical switches employing stepper motor technology can make switches of this size. One more method is to create the switch by cascading smaller switch elements, such as combinations of 1x2 or 2x2 switches, although for switch fabrics of this size the number of elements needed generally makes cascading smaller switches a less attractive option.

Another method for reducing the size of the switch fabric is limiting the connectivity of the WSXC. In the case where one of the fiber rings requires connectivity to all other rings, but the other rings only connect to themselves or the first ring, the switch fabric can take the form shown in Figure 11, in which full details are shown for only two of the six rings. In the case of our six-ring example, this corresponds to one 'access ring' cross-connected to another ring which consist of a set of 5 overlaid fiber rings. This switch fabric shown in the example requires fewer switch elements or cross-points than the corresponding fabric that provides full connectivity. Furthermore, the reduced switch fabric and can easily be built out of

smaller switches with a modular construction that allows other fibers rings to be added to the network by simply adding components to the existing switch fabric. This is a big advantage over the full connectivity case, where adding another fiber ring may require either the purchase of all new switching fabrics of a larger size, or the up front purchase of a large switching fabric.

In the case of such partial connectivity, the only component where it may be desirable to initially purchase a large device is the 1xN switch. Even that can easily be made modular (at the price of a slightly higher insertion loss) by cascading one or two levels of smaller switches. For example, a 1x6 can be made out of 1 1x3 and 3 1x2 switches, and so initially for a 2 fiber ring network topology, only the 1x3 and 1 1x2 would need to be purchased, and two more fiber rings could be added for each additional 1x2 used. Also, the existing traffic would not be affected during the upgrade, which wouldn't be true in the case where entire switch fabrics are being replaced.

#### Ring-Based Optical Management Communication

An optical network element (ONE) can be categorized as a piece of transmission equipment that transports multichannel optical signals. Examples of ONEs are wavelength terminal multiplexers (WTMs), wavelength add-drop multiplexers (WADMs), and optical cross-connects (OCXs). One type of cross-connect, a wavelength selective cross-connect (WSXC), in one example application, interconnects two optical rings – an access ring and an interoffice ring. This is shown, for example, in Figure 12.

Point-to-point WDM standards as well as emerging Optical Transport Network standards call for the use of an Optical Supervisory Channel (OSC) between each optical network element. The standardized wavelength for this OSC is 1510+/- 10nm. The OSC is used to send and receive a signal that includes management messages on the performance of the span and relayed messages from a network management system. This is illustrated for an access ring in Figure 13.

For a typical implementation of a WADM, or a WSXC, an incoming OSC signal must be: demultiplexed from the bundle of Optical Channels; converted to an electrical signal for processing; recreated as an outgoing OSC; and multiplexed back

with the transmission signals (i.e. the Optical Channels). An example of this is shown in Figure 14. The Optical Channels passing through an optical network element on a ring get attenuated by the OSC demultiplexer and the OSC multiplexer components.

An Optical Channel being added onto the ring, passing through K optical network elements, and then being dropped from the ring experiences a loss L due to the presence of the Optical Supervisory Channel, where

$$L = (K+1) \times L_{MUX} + (K+1) \times L_{Demu} \quad (1)$$

It is desirable to support a ring with up to 8 nodes (K=6) or more. Assuming a worst-case OSC multiplexer loss of 0.5 dB and a demultiplexer loss of 0.5 dB, this adds up to 7.0 dB loss around a ring due to the presence of an OSC. If a splice loss of 0.2 dB per device is included, the loss around a ring due to the OSC increases to 9.8 dB. Smaller losses are desirable.

One way to achieve smaller losses and still provide network management communications is to use a mediation device such as shown in Figure 15.

Instead of the ring nodes using an OSC for management messaging, each ring node has a separate interface to a mediation device. The mediation device receives inputs from all the ring nodes as well as the network management system (NMS), and directs the messages to the appropriate ONE or NMS. The mediation device may employ a local area network (LAN) interface. The advantage of this approach is that the optical channels incur no loss from the presence of an OSC. The disadvantage is that the ring nodes must each support a LAN or other interface. If this interface is electrical, then the ring size may be constrained by the transmission distance of the interface. If the interface is optical, then each ring node requires an additional fiber pair (as well as a transmitter and receiver).

Another way to provide for network management communications with smaller losses is to place the mediation device functionality within the WSXC, and find an economical and loss-conscious way of transmitting to and from this mediation function. An embodiment is shown in Figure 17.

All management messages from the mediation function to the WADMs are logically placed into an optical signal outside the transmission band of the Optical Channels (e.g. 1510nm), and this signal is broadcast in one direction around the ring.



Each WADM taps off a portion of this signal, converts it to an electrical signal, and processes the messages that are logically directed to it.

All management messages from the WADMs back to the mediation function are transmitted via subcarrier modulation (SCM). An Optical Channel being added at the WADM is overmodulated by a relatively lower frequency carrier tone, which in turn carries digital data. Each WADM overmodulates a different Optical Channel at a different SCM frequency. A portion of the Optical Channels' signals is tapped at the WSXC. Since an Optical Channel may operate unprotected on the ring and travel in either direction (clockwise or counterclockwise), the WSXC desirably can tap subcarrier modulated signals from either input fiber. Digital signal processing is performed at the WSXC to decode the various SCM signals, which are then fed into the mediation function.

All management messages between the mediation function and the WSXC proper are transmitted internally within the WSXC (e.g., via an electrical backplane).

#### Messaging from Mediation Function to WADM

The messaging from the mediation function to a WADM can go as follows. The bit rate of what is termed the "downstream management signal" is selected so as to be able to support all the messages among the ring nodes and the network management system. A 155.52 Mb/s SONET OC-3 signal, for example, is likely sufficient. The downstream management signal can be logically divided to at least include messages from the network management system to any ring node, and from any ring node to its nearest neighbors. This is illustrated in Figure 17. The downstream management signal may be transmitted at the WSXC as shown in Figure 16.

The downstream management signal is received at a WADM on the ring as shown in Figure 18. The downstream management signal and the Optical Channels arrive at the right of the figure, and a small amount of the incoming signals is tapped off. The downstream management signal is demultiplexed from the tapped-off light, converted to an electrical signal and processed by the local network element management processor. The rest of the incoming signal is processed for the needs of the Optical Channels. This processing desirably incurs no significant power loss for the downstream management signal.

For example, a conventional long-haul SONET/SDH transmitter at 155.52 Mb/s can be expected to have a worst-case end-of-life average power to -5 dBm. Assuming, for example, that the downstream management signal has to cross 7 spans, each with a loss of 1.8 dB (2 km of fiber at 0.4 dB/km plus 2 connectors at 0.5 dB), the

5 management signal also passes through 6 intermediate tap couplers, each with a loss of 0.18 dB (4% coupler). The final tap coupler introduces 14.0 dB of loss, followed by an optical demultiplexer with 0.5 dB loss. The signal power at the receiver is then -33.2 dB, which is well within the worst-case end-of-life range of a SONET OC-3 receiver.

An Optical Channel being added onto the ring, passing through K optical

10 network elements, and then being dropped from the ring in this implementation experiences a loss L due to the management messaging system, where

$$L = (K + 1) \times L_{Tap} + L_{SCMpenal}. \quad (2)$$

For a ring with up to 8 nodes (K=6), a worst-case optical tap loss of 0.18 dB and a subcarrier multiplexing penalty of 1.0 dB, this adds up to 2.3 dB loss around a ring

15 due to this implementation of management messaging. The comparable loss using an OSC implementation was 7.0 dB.

#### Messaging from WADM to Mediation Function

The messaging from a WADM to the mediation function can go as follows.

20 First, the "upstream management signal" desirably at least supports messages from that node to its nearest neighbors, plus to the network management system. An illustration of this logical structure is shown in Figure 19.

The bit rate to be used is constrained by what subcarrier modulation can support. A standards proposal from Nortel (Philippe Neusy, Nortel Networks,

25 "Subcarrier Modulation of Client Signals: Implementation Issues," TIA FO 2.1.1 standards contribution FO211-98-09-TD06 [also T1X1.5/98-122], September 22, 1998) indicates that SCM induces a penalty on the Optical Channel that is dependent on the bit rate. This is shown in Figure 20. To keep the induced penalty below 1 dB, for example, means that a 622.08 Mb/s OC-12 (STM-4) signal can have an SCM channel

30 bit rate of 10 Kb/s. This increases to 50 Kb/s for a 2.5 Gb/s OC-48 signal.

The upstream management signal is transmitted from a WADM as shown in Figure 21. The WADM has an Optical Channel that is being added and routed to the WSXC. The upstream management signal is encoded to the SCM frequency, and the Optical Channel is amplitude modulated. The modulated Optical Channel is multiplexed with the other Optical Channels and is routed to the WSXC.

The WSXC receives the upstream management signal as shown in Figure 22. The Optical Channel arrives at the left of the figure, and a small amount of the incoming signals is tapped off. The Optical Channels are demultiplexed from this tapped-off light, and the modulated Optical Channels are filtered to recover the individual subcarrier modulated signals. These are converted into electrical upstream management signals that are then routed to the mediation function. Note that the overmodulation remains on the affected Optical Channels until they are terminated (or 3R regenerated). With the low bit rates involved, sufficient power will reach the receivers.

In summary, the embodiment of the invention described above with reference to Figures 12-22 provides a management communication system among optical network elements arranged in a ring of nodes, where one ring node has a mediation device functionality. The mediation device function relays management messages as needed among the nodes and the network management system. The node with the mediation device functionality sends messages to the other ring nodes by broadcasting a single channel optical signal whose frequency is outside the transmission band of the Optical Channels. The other rings nodes each send messages to the node with the mediation device functionality by subcarrier modulation of an added Optical Channel. The structure of the message channel from the node with mediation device function to the other nodes (and vice versa) is logically or otherwise partitioned to allow messages from any source node (or NMS) to any sink node (or NMS).

#### Interconnection of Optical Channel Dedicated Protection Rings

With the advent of all-optical networking, there has been growing interest in using Optical Add-Drop Multiplexers (OADMs) to implement high capacity DWDM ring networks with add-drop functionality provided all-optically without any unnecessary O-E-O conversion for traffic passing straight through a node on the ring. One of the key functions of an OADM is to provide protection of the client signal. This

means that the client signals can still be transmitted from the ingress node to the egress node even if a failure such as a fiber cut occurs within the ring network.

There are many different varieties of protection schemes, which will not be described in detail here. The simplest scheme to implement and most popular scheme for use in metropolitan networks, is known as Optical Channel Dedicated Protection Ring or OChDPRING. The basic principle of operation of an OChDPRING is illustrated in Figure 23. Two fibers, each carrying traffic in opposite directions, are used to route traffic around the ring. Client signals entering the network at the ingress node are duplicated, routed in opposite directions around the ring over the two fibers, and one of the two optical signals is then selected at the receiver. One of these paths is designated 'working' and is the path normally used to transmit data, and the other path is designated 'protection' and only used if the working path fails. This is illustrated in Figure 24.

The signal duplication at the ingress node, known as bridging, and the selection of one of the signals at the receiver, may be carried out in either by the OADM (Figure 23B) or by the client itself (Figure 23A).

As such rings become more prevalent in metro networks, the need arises to interconnect rings to allow traffic to flow from one ring to another. One approach to doing this is the direct interconnection method, shown in Figure 25. Here, the working path from one ring is connected to the working path on the other ring, and the protection path on one ring is connected to the protection path on the other ring. Such a scheme would survive a fiber cut in either ring. However, the protection of traffic on each ring would not be independent in the sense that whether or not a ring could heal from a failure would depend upon whether or not a failure exists in the other ring. This is illustrated in Figure 26. If a failure occurs on the working path on one ring and the protection path of the other ring, the traffic is lost. This characteristic is highly undesirable and a better method of interconnecting rings while preserving the independence of the protection schemes on both rings is required.

An alternative method of interconnecting rings using two interconnecting nodes is as shown in Figure 27. This method may be referred to as the dual transmit with drop and continue method. The method preserves the independence of the protection

schemes on each ring and also has no single point of failure. Two nodes are used to interconnect this ring and the working and protection signals are duplicated and sent to both nodes. 2x1 switches are then used at each node to select either of the working and protection signals from one ring for transmission onto the second ring. As shown in  
5 Figure 28, this scheme maintains the connection for any combination of single failures in each ring.

However, this method has at least two significant drawbacks. First, two nodes are required to interconnect the rings. Although this is perfectly acceptable in long haul applications, metropolitan networks are far more cost sensitive and the use of two  
10 WSXC to interconnect rings is cost prohibitive. In addition, since the signal now has to propagate through an additional WSXC, the signal suffers additional loss, bandwidth narrowing and optical signal-to-noise ratio degradation. This limits the size of the network or increases the cost of the WSXC in order to minimize these degradations. (Note that the connection between the WSXCs is a multi-wavelength connection over a  
15 single fiber. Hence, the signals need to go through an additional stage of multiplexing, amplification and demultiplexing to go from one WSXC to the other.)

A low cost means of interconnecting two OChDPRINGs while preserving the independence of their protection schemes and minimizing the optical signal degradation is achieved by using a single interconnection node with a novel internal architecture to  
20 maintain the independence of the protection schemes.

An example embodiment is shown in Figure 29. Here, the interconnecting node selects the better of the two copies (working or protect) of the signal from the first ring and duplicates the signal for transmission onto the second ring. As shown in Figure 30, this scheme maintains the connection for any combination of single failures in each  
25 ring.

However, this method has one drawback in that the selector and bridge at the interconnection node are a single point of failure. If either of these two components fails, the traffic will be lost.

A second example embodiment avoids this single point of failure and is shown  
30 in Figure 31. Here, both working and protection signals from the first ring are duplicated first, and then two 2:1 switches are used to select the better of the working and protect signals from ring 1, and transferred to the working and protect paths of the

second ring. This method effectively provides protection for the bridge and switches in the interconnection node.

As can be seen in Figure 32, the independence of the protection schemes on both rings is preserved, and there is no single point of failure in the path.

5

Improvement of optical network ripple by use of narrow-band amplifiers

The optical performance (noise figure and ripple) of a wavelength selective crossconnect (WSXC) can be improved by using a combination of wide-band optical amplifiers and narrow-band optical amplifiers.

10 Wavelength selective crossconnects (WSXC) are a critical element in all-optical wavelength division multiplexed networks. Interconnections between all various fiber rings occurs at the WSXC. The WSXC demultiplexes the wavelength channels carried on the input fibers, amplifies or regenerates them, then routes and multiplexes the signals destined for the same output fiber.

15 In all-optical wavelength division multiplexed networks, wavelength ripple (differences in loss/gain for the various wavelengths in the system) from the optical components in the WSXC creates a significant constraint on the performance of the network. It can limit both the size and the data rate of the system. The wavelength ripple arises from both passive and active components, but one of the most significant  
20 sources of ripple is the optical amplifiers in the system. For optical amplifiers, a major component of the ripple arises from the control of the gain of the amplifier, especially as individual wavelength channels are added or dropped from the system. The addition or removal of wavelength channels over a wide (30 nm) optical spectrum causes the optical amplifier to operate at non-ideal inversion levels, creating the wavelength  
25 ripple. Also, wavelength dependent variations in optical components such as taps (such as those that may be used to monitor power levels in the amplifier in order to provide feedback to the gain control mechanism) can also contribute to the difficulty in achieving precise gain control over a wide optical spectrum.

An improvement in optical performance of the WSXC can be achieved by  
30 employing a combination of wide-band and narrow-band optical amplifiers. Figure 33 depicts the optical schematic for a WSXC with a combination of wide-band and narrow-band amplifiers. The optional OTS termination removes the OSC and any

CDWM signals and, although Figure 33 only shows the path for one band, the OMS signal could be split into C and L bands, or more. (The optical path for each band would be equivalent, so only one is shown here, for ease of illustration.) The signal then travels to the low-gain wide-band amplifier, through a band demux and to the  
5 narrow-band amplifiers. The bands are demuxed into their constituent wavelengths, the signals are switched to the appropriate output fibers (or added or dropped) and the wavelengths are multiplexed back into bands. The bands are amplified by an output narrow-band amplifier, and then muxed back together. Finally, the OSC is added to the OMS and the OTS is sent out on the output fiber.

10 The regime the amplifiers are operated in, and the bandwidth of each amplifier, are selected in light of the following considerations. Operating the first wide-band amplifier in an unsaturated regime (i.e., where the inversion is high and the output power is low so that the gain of the stage is relatively unaffected by small changes in the total signal power within the anticipated range of operation) provides essentially a  
15 fixed channel gain that is independent of the number of channels present in the band. Therefore, this amplifier requires little or no gain control, and the contribution to the overall amplifier ripple is minimal. The ripple of this amplifier is also small since the gain is relatively static, and can be reduced or controlled by conventional methods such as gain flattening filters (GFFs).

20 The narrow-band amplifiers provide gain for a smaller grouping of wavelengths, called sub-bands. In this example, the C (and/or the L) band is broken into 4 equally sized sub-bands, but in general, the C (and/or the L) band could be split up in any combination of sub-bands that individually have a narrower bandwidth than the C (or L) band. By reducing the bandwidth of the amplifier, there are two potential  
25 reductions in the ripple of the amplifier. First, the narrow bandwidth will intrinsically have less ripple than a wide-band amplifier due to the complex nature of the gain spectrum of the amplifier. Secondly, gain control of the narrow-band amplifier will be easier since there are fewer combinations of channels to consider for adding and dropping and also there is less intrinsic gain ripple. Furthermore, the typical gain  
30 control technique which utilizes the total signal power into and out of the amplifier works most accurately when all of the signals have nearly equal power. This allows the

use of simpler control algorithms for the gain control for each of the sub-band amplifiers. Also, the wavelength variations of the feedback taps will be minimized since the wavelength range of their operation is reduced.

Another advantage of the narrow-band amplifiers is that the total output power needed is less than a wide-band amplifier because there are fewer channels in the amplifier. For example, if the wide-band amplifier supports 16 channels, then a narrow-band amplifier with only 4 channels has a total output power 6 dB less than the wide-band amplifier. This allows for less expensive pump lasers to be employed in the narrow-band amplifier.

Further, the pairs of narrow-band amplifiers (input and output) can use matched gain-flattening filters to reduce the ripple of the amplifier. Although matched GFFs are commonly used for wide-band amplifier pairs, they must cover a much wider range of wavelengths and therefore are more difficult and expensive to make, and may have reduced gain-flattening ability compared to a matched set of narrow-band GFFs. It may be advantageous in terms of manufacturing, however, to have only a limited set of GFFs that can be used in many different narrow-band amplifiers (i.e. the same narrow-band amplifier design could be used to amplify either sub-band 1 or sub-band 2).

There is a cost disadvantage to amplification on a narrow-band basis because of the need for the band demux and muxes as well as the duplication of components for the narrow-band amplifiers. However, in the case of a WSXC, the signal is being demuxed/muxed to a band level before the individual channel demux/muxes. Also, by operating on a band basis, the system is more modular and can be deployed on a per-band basis.

#### Modular and efficient partitioning of an optical cross connect

Optical cross connects (OXC) are an essential part of optical networks, which allow circuits (wavelength channels) to be provisioned across a network. OXC are required to facilitate provisioning of circuits, protection and restoration of traffic, grooming, and bandwidth management. In order to do this, OXC must be able to carry out multiple functions on each wavelength channel including signal amplification, multiplexing and demultiplexing of individual wavelength channels or bands, switching and routing of channels and channel power equalization.



An example schematic of an OXC is shown in Figure 34.

Due to the large numbers of channels and I/O ports, optical cross connects are large pieces of equipment typically occupying several racks or bays. However, network operators naturally desire that optical cross connects be modularly-upgradable so that only a small number of modules are needed to install the OXC initially with a few channel capacity, but allowing the OXC to be gracefully upgraded as more capacity (channels) are needed. This need for modular upgradability implies that the OXC design must be partitioned into modules which can then be added on an as-needed basis. Partitioning of the OXC into smaller modules which can be replaced individually is also necessary to provide the equipment reliability needed in the telecom industry since the overall system can be designed so that failed modules can be replaced without affecting other parts of the system.

Each of the functional elements shown in Figure 34 may be formed and structured as an individually replaceable unit or module. Hence, the OXC would consist of a multitude of different types of circuit packs, each carrying out just one function on just one channel, or a small subset or band of channels. This, however, has multiple drawbacks. For example, each channel passes through a large number of optical taps as it enters and exits each replaceable unit—these taps are required to monitor the optical signal and to allow fault location down to the smallest replaceable unit, and these taps increase the loss along the signal path and add to cost. Further, since each functional unit may be replaced at any time in the field, the OXC must be designed to operate with the worst case combination of losses for each path or, alternatively, multiple spares must be retained on-site by the user in order to ensure that the user has a module at hand of the appropriate loss in order to replace a failed unit and still maintain the same optical loss for the signal.

By an efficient and modular design of an optical cross connect, the optical path loss through the OXC can be reduced and further, the variability of this total loss between units in a manufacturing environment can also be reduced. If, instead of having the OXC partitioned by functionality, the OXC is partitioned along the optical path of each channel or band or channels, graceful channel-by-channel or band-by-band expansion characteristics can be maintained while minimizing the path loss through the OXC. This is achieved, at least in part, by: (a) minimizing the number of taps (which

are needed at the input and outputs of each replaceable unit for localizing equipment faults); (b) increasing the scope for selective assembly to reduce the variation in signal path loss by putting more optical components on a single replaceable unit. Reducing the variability of the insertion loss is especially important in transparent optical

5 networks since the loss within an OXC and the optical gain needed to compensate for this can be an important factor which limits the size of optical network over which a purely optical signal can propagate without the need for electronic regeneration. Greater variability in the path loss typically requires that extra margin be left in the system (e.g. assuming a 'worst case' design in which all cross-connects are assumed to

10 have a total loss which is well in excess of the sum of the average losses of the individual components). Thus, reducing the variability of the loss can be as important as reducing the loss itself.

An embodiment of this aspect of the invention is shown in Figure 35. Here, the mux/demux, switching and power equalization function for each wavelength band has

15 been integrated into a single module. Now, optical taps are only required at the input and output of module and not before and after each functional element. This reduces the loss seen by each wavelength channel.

In addition, since the module now contains multiple components in the same signal path, selective assembly can be used to reduce the variation in signal path loss through

20 the OXC. Variations in signal path loss have an effect similar to that of amplifier gain ripple and can significantly limit the number of OXCs that can be cascaded in a network. Selective assembly refers to the selection of optical components used in each optical path in such a manner so as to reduce the variation in path loss. Thus, for example, the components to be used in the assembly/manufacture of the modules would be sorted by

25 insertion loss within each different type of component. Power equalization units with above average loss could then be used with mux/demuxes with below average loss and vice versa. Note that without integrating these functions onto a single replaceable unit, selective assembly becomes very difficult to do. Since new functional elements would be added and replaced in the field, an equipment manufacturer would potentially have

30 little control over the relative loss of different components that were installed in a particular signal path after manufacture.

In the past, conventional wisdom has counseled against such an approach, at least in part because of reliability requirements. Grouping multiplexers or demultiplexers with other components means that a failure of any of the single components requires an interruption (e.g., a protection switch) of all of the channels that pass through that module (i.e., the whole band the uses the same MUX/DEMUX). This problem has been mitigated by a number of recent developments. The cost of optical components has dropped so that they are now used in less-heavily-shared parts of the network (where fewer users' signals are combined or multiplexed together to amortize equipment cost), and thus reliability requirements are not as extreme. Also, the growing experience with optical components has shown that they are reliable enough to be combined.

Another example embodiment using this partitioning is shown in Figure 36. In this example, the OXC has been partitioned to separate East and West ports. This is required to prevent a single point of failure when the OXC is used with a 2F-BLSR SONET protection scheme. The example also shows optical amplification on a per-band basis incorporated onto the same modules as the optical channel mux/demux. Similarly, the power equalization function is integrated with the optical channel multiplexing function. In this example, the optical switching function has not been integrated into the mux/demux modules.

Although the embodiments described above relate to a wavelength selective cross connect (i.e. one without the ability to perform wavelength conversion), the invention also applies to wavelength interchanging cross connects (i.e. ones with wavelength conversion capabilities).

#### Method for control of ripple compensation for a WSXC

Wavelength selective cross-connects (WSXC) are a critical element in all-optical wavelength division multiplexed networks. Interconnections between all various fiber rings occurs at the WSXC. The WSXC demultiplexes the wavelength channels carried on the input fibers, amplifies or regenerates them, then routes and multiplexes the signals destined for each output fiber. Figure 37 shows an example optical network with an IOF (Inter-office) ring and several access rings.

In all-optical wavelength division multiplexed networks, wavelength ripple (differences in loss/gain for the various wavelengths in the system) from the optical components in the network creates a significant constraint on the performance of the network. It can limit both the size and the data rate of the system. The wavelength  
5 ripple arises from both passive and active components, both internal and external to the WSXC. Therefore, the total ripple for the different paths through the WSXC may vary due to the differences in the ripple external to the WSXC.

One way to compensate ripple in the WSXC is by individual channel power equalization (PEQ). The typical method for channel PEQ is via a variable optical  
10 attenuator (VOA) on the demultiplexed signal that is controlled by a feedback loop. The attenuator is set to some nominal attenuation value, and then the ripple in the system is corrected by either increasing or decreasing the loss of the VOA. But this method has a disadvantage in that all paths in the WSXC (i.e., IOF to IOF, Access to IOF, IOF to IOF, and Access to IOF) all have the same nominal attenuation value of the  
15 VOA, and suffer the accompanying performance penalties.

As an alternative, ripple can be compensated by (1) increasing the gain of the input amplifier as necessary so that the weakest channel has a minimum targeted power level, and (2) using individual channel power equalization to make all the channels have a flat spectrum at the output of the WSXC.

20 A simplified example schematic of the amplifiers and the signal paths for a WSXC which connects an access ring and an IOF ring is depicted in Figure 38. The amplifiers shown are representative of total amplification on each path, and each may actually consist of several discrete amplifiers. The input spectrum of the signals from the IOF ring is considered to be flat, since the last optical node the signals traveled  
25 through was another WSXC that had power equalization. The signals from the access ring are initially calibrated at system deployment to provide a flat input spectrum at the WSXC. However, over time, the signals could have significant power divergence due to aging in components or changes in the access ring after initial deployment and calibration.

30 The gains on the input amplifiers are increased so that the input channel with the lowest power is amplified to some necessary minimum power at the input of the

multiplexor stage of the WSXC. The channel power equalization then attenuates all the other signals to the appropriate levels to provide a flat signal spectrum at the output of the WSXC. Since the input ripples may be different, the amount the amplifier gain is increased will vary depending on the path. Take, for example, a case where the channel  
5 that has the least gain internal to the WSXC happens to be the channel that also has the lowest input power from the access ring. The access ring amplifier would increase its gain until that channel met some minimum power level at the input to the multiplexor, and all the other channels from that path would be attenuated by the PEQ to the appropriate power levels so that the output of the WSXC would be flat. The signals  
10 that were from the IOF would not be affected by the input ripple of the access ring, and would not suffer any resultant PEQ from to correct for that ripple. The IOF would have its own gain levels and PEQ levels to correct for any ripple on its path.

It is important to note that the amplification on any stage of the WSXC could consist of stages of discrete amplifiers, so that the gain increase of the input  
15 amplification stage could be performed in any combination of the gains and power levels of the discrete amplifiers. In the case of band amplifiers, it would be a cost advantage to adjust the gain of a wide-band amplifier rather than a larger number of narrow-band amplifiers. Also, note that any the gain compensation for external ripple could be used on only one of the two paths for the WSXC, or could still be used in  
20 combination with a nominal PEQ set-point method or any other standard control method of ripple compensation.

As will be understood by those of skill in the art, the foregoing aspects and embodiments of the present invention may be used in cooperation with each other as desired in various combinations and sub-combinations to provide improved  
25 transparency, flexibility, and performance in optical networks. The foregoing is also illustrative of the invention only, and various modifications will be apparent to those of skill in the relevant art. Accordingly, the invention is not limited to the foregoing exemplary embodiments, but includes all subject matter within the legal scope of the following claims.

WE CLAIM:

1. A wavelength selective optical cross-connect device comprising:
  - a. a first demultiplexor arranged to demultiplex an incoming signal;
  - 5 b. a plurality of individually removeable modules, each module arranged to receive an output of the first demultiplexor and each including at least an optical switch for switching said output of the first demultiplexor.
- 10 2. The device of claim 1 further comprising a first multiplexor arranged to receive a respective outgoing signal from said each module of the plurality of individually removeable modules and to provide a multiplexed outgoing signal from the device.
- 15 3. The device of claim 2 wherein said each module further includes a respective second multiplexor arranged to pre-multiplex said respective outgoing signal before the first multiplexor.
- 20 4. The device of claim 3 wherein said each module further includes a power equalization array arranged to equalize the power of a respective outgoing signal from said each module.
- 25 5. The device of claim 1 wherein said each module further includes a respective second demultiplexor arranged to further demultiplexing said output of the first demultiplexor.
6. The device of claim 1 wherein said each module further includes a power equalization array arranged to equalize the power of a respective outgoing signal from said each module.
- 30 7. The device of claim 6 wherein said power equalization array is arranged to equalize the power of respective outgoing signal from each said module with

respect to the power of respective outgoing signals other modules of said plurality of modules.

- 5 8. The device of claim 6 wherein said power equalization array comprises an amplifier for each of multiple wavelength channels for each module.
9. The device of claim 6 wherein said power equalization array comprises a variable attenuator for each of multiple wavelength channels for each module.
- 10 10. The device of claim 1 further comprising an optical protection switch separate from said optical switch.
11. A wavelength selective optical cross-connect device comprising
  - 15 a. a first demultiplexor arranged to demultiplex an incoming signal;
  - b. a first multiplexor arranged to provide an outgoing signal; and
  - c. a plurality of individually removeable modules, each module arranged to receive a respective output of the first demultiplexor and feed a respective output of said module into said first multiplexor, each module including at least (i) a second demultiplexor arranged to further demultiplex the  
20 respective output of the first demultiplexor, (ii) a power equalization matrix arranged to equalize the power in channels from the second demultiplexor, and (iii) a second multiplexor arranged to pre-multiplex the channels from the second demultiplexor to form the output of said module.
- 25 12. The device of claim 11 further comprising one or more switch fabrics arranged to switch channels within one or more of the modules.
13. The device of claim 12 wherein said one or more switch fabrics are removable from the device and replaceable within the device.
- 30 14. The device of claim 13 wherein said one or more switch fabrics include a manual switch fabric with automated connection discovery.

15. The device of claim 14 wherein the manual switch fabric is a patch panel with electrical leads in the fiber patch cords arranged for automated connection discovery.
- 5
16. The device of claim 14 wherein said manual switch fabric includes one or more interfaces with the rest of the device that are identical or compatible with an interface employed by a switch fabric having remote or automatic reconfigurability, such that the device is readily upgradeable to a switch fabric having reconfigurability.
- 10
17. The device of claim 13 wherein the one or more switch fabrics include two or more switch fabrics separately and individually removeable.
- 15
18. The device of claim 13 wherein the one or more switch fabrics include two or more switch fabrics separately and individually upgradeable.
19. The device of claim 13 wherein the one or more switch fabrics include one manually reconfigurable switch fabric and one remotely reconfigurable switch fabric.
- 20
20. The device of claim 12 further comprising one or more protection switches separate from said one or more switch fabrics.
- 25
21. A wavelength add-drop module device for receiving network management messages or commands from a network management controller transmitted with communications traffic via a fiber connection, the device comprising a tap on the signal from an incoming fiber connection and a receiver arranged to detect signals on the tap.
- 30
22. The device of claim 21 further comprising a demultiplexor on the tap before the receiver.



23. The device of claim 21 further comprising a subcarrier modulator for sending device messages to the network management function.
- 5 24. The device of claim 23 wherein the subcarrier modulator is positioned and arranged to modulate the signal on optical channel added at the device.
- 10 25. A wavelength selective optical cross-connect device for providing ring or network management, the device comprising subcarrier demodulator for receiving messages from one or more wavelength add-drop modules on the associated ring or network, and a transmitter for transmitting messages at a selected wavelength to said modules.
- 15 26. The device of claim 25 further comprising a controller for performing monitoring and control functions for the device and for said one or more wavelength add-drop modules.
- 20 27. The device of claim 25 further comprising a tap arranged to provide a portion of an incoming signal to the subcarrier demodulator.
28. The device of claim 27 further comprising a demultiplexor arranged to demultiplex the tapped portion of the incoming signal.
- 25 29. The device of claim 28 further comprising multiple filters arranged to filter the demultiplexed signals from the tapped portion of the incoming signal.
30. A method of providing for communications for ring or network management in an optical fiber network that is at least in part ring-based, the method comprising:
- 30 providing at least one wavelength selective cross-connect on a ring in the network, the cross-connect including a controller or mediation

function and at least one transmitter arranged to transmit on a network communications frequency and a subcarrier demodulator;  
providing one or more wavelength add-drop modules connected to said ring and each including a subcarrier modulator for sending signals to  
5 said subcarrier demodulator;  
sending control messages from the controller to the one or more wavelength add-drop modules via the transmitter on the a network communications frequency;  
receiving said control messages from the controller in the one or more  
10 wavelength add-drop modules;  
sending messages from the one or more wavelength add-drop modules to the controller via subcarrier modulation; and  
receiving and decoding said messages from the one or more wavelength add-drop modules via subcarrier demodulation.

15  
31. The method of claim 30 wherein the step of sending messages from the one or more wavelength add-drop modules to the controller via subcarrier modulation comprises modulating a different optical channel with each of said one or more wavelength add-drop modules.

20  
32. The method of claim 30 wherein the step of sending messages from the one or more wavelength add-drop modules to the controller via subcarrier modulation comprises modulating at a different subcarrier frequency at each of said one or more wavelength add-drop modules.

25  
33. The method of claim 32 wherein the step of sending messages from the one or more wavelength add-drop modules to the controller via subcarrier modulation comprises modulating a different optical channel at a different subcarrier frequency with each of said one or more wavelength add-drop modules.



30  
34. The method of claim 30 wherein the step of receiving said control messages from the controller in the one or more wavelength add-drop modules comprises

tapping a portion of the incoming signal at each of said one or more wavelength add-drop modules.

35. The method of claim 34 wherein the step of receiving said control messages  
5 from the controller in the one or more wavelength add-drop modules further comprises demultiplexing the network communications frequency from the tapped portion of the incoming signal.
36. The method of claim 30 wherein the step of receiving said control messages  
10 from the controller in the one or more wavelength add-drop modules comprises detecting logically instructions that are directed to a receiving one of the one or more wavelength add-drop modules and processing said instructions.
37. The method of claim 30 wherein the step of receiving and decoding said  
15 messages from the one or more wavelength add-drop modules via subcarrier demodulation includes using a digital signal processor to separate and decode the messages.
38. A wavelength selective optical cross-connect device comprising:  
20 a pair of wavelength-layered cross-connect switch fabrics, the pair of fabrics being connectively surrounded by one-by-two switches so arranged as to be able to switch any input or output associated with the fabrics from one of the pair of fabrics to the other of the pair of fabrics to provide protection  
switching function, while the fabrics are arranged provide path switching  
25 function.
39. A method of providing protection switching and path switching in a wavelength  
selective optical cross-connect device, the method comprising:  
employing one-by-two switches to selectively connect input and output  
30 wavelength channels to either of two wavelength-layered cross-connect fabrics to provide a protection switching function; and

employing said two wavelength-layered cross-connect fabrics to provide a path switching function.

- 5 40. A wavelength selective cross-connect device for interconnecting two or more fiber rings, the device comprising a first optical switch arranged and positioned so as to be able to selectively connect a first loop of a first ring to either a first loop of a second ring or a second loop of the second ring; and a second optical switch arranged and positioned so as to be able to selectively connect a second loop of the first ring to either the first loop of the second ring or the second loop  
10 of the second ring.
41. The device of claim 40 wherein the first and second optical switches are one-by-two optical switches.
- 15 42. A wavelength selective optical cross-connect device comprising an input signal path including, in order, a wide band amplifier, a first demultiplexor, and a plurality of narrow band amplifiers arranged in parallel.
- 20 43. The device of claim 42 further comprising respective second demultiplexors following said narrow band amplifiers.

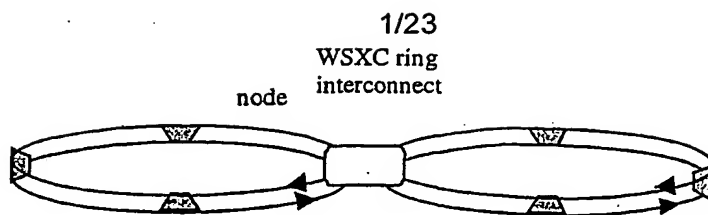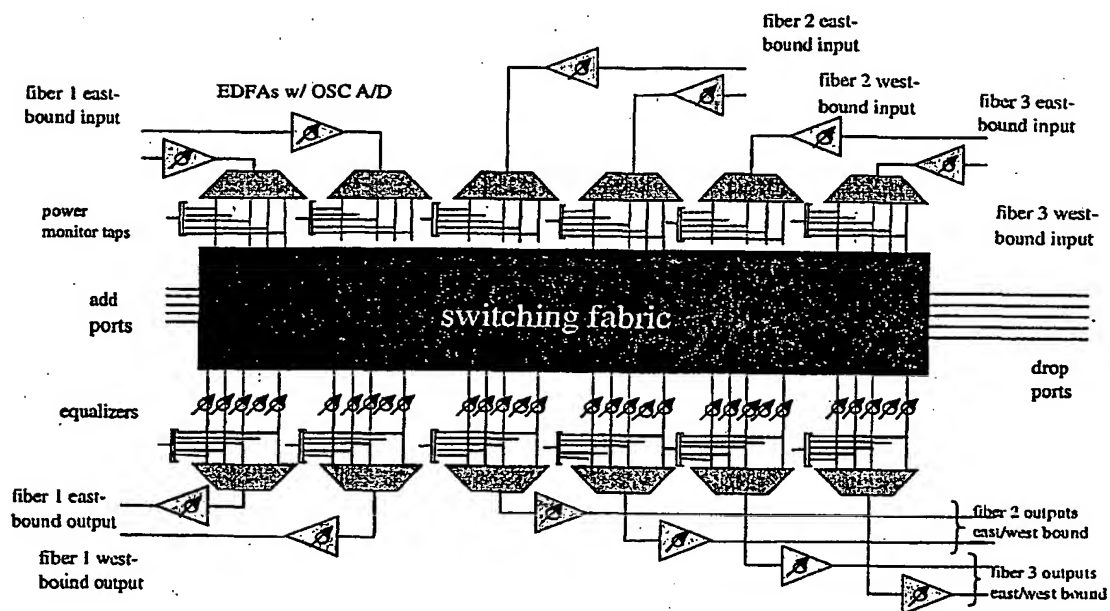**Figure 1****Figure 2**

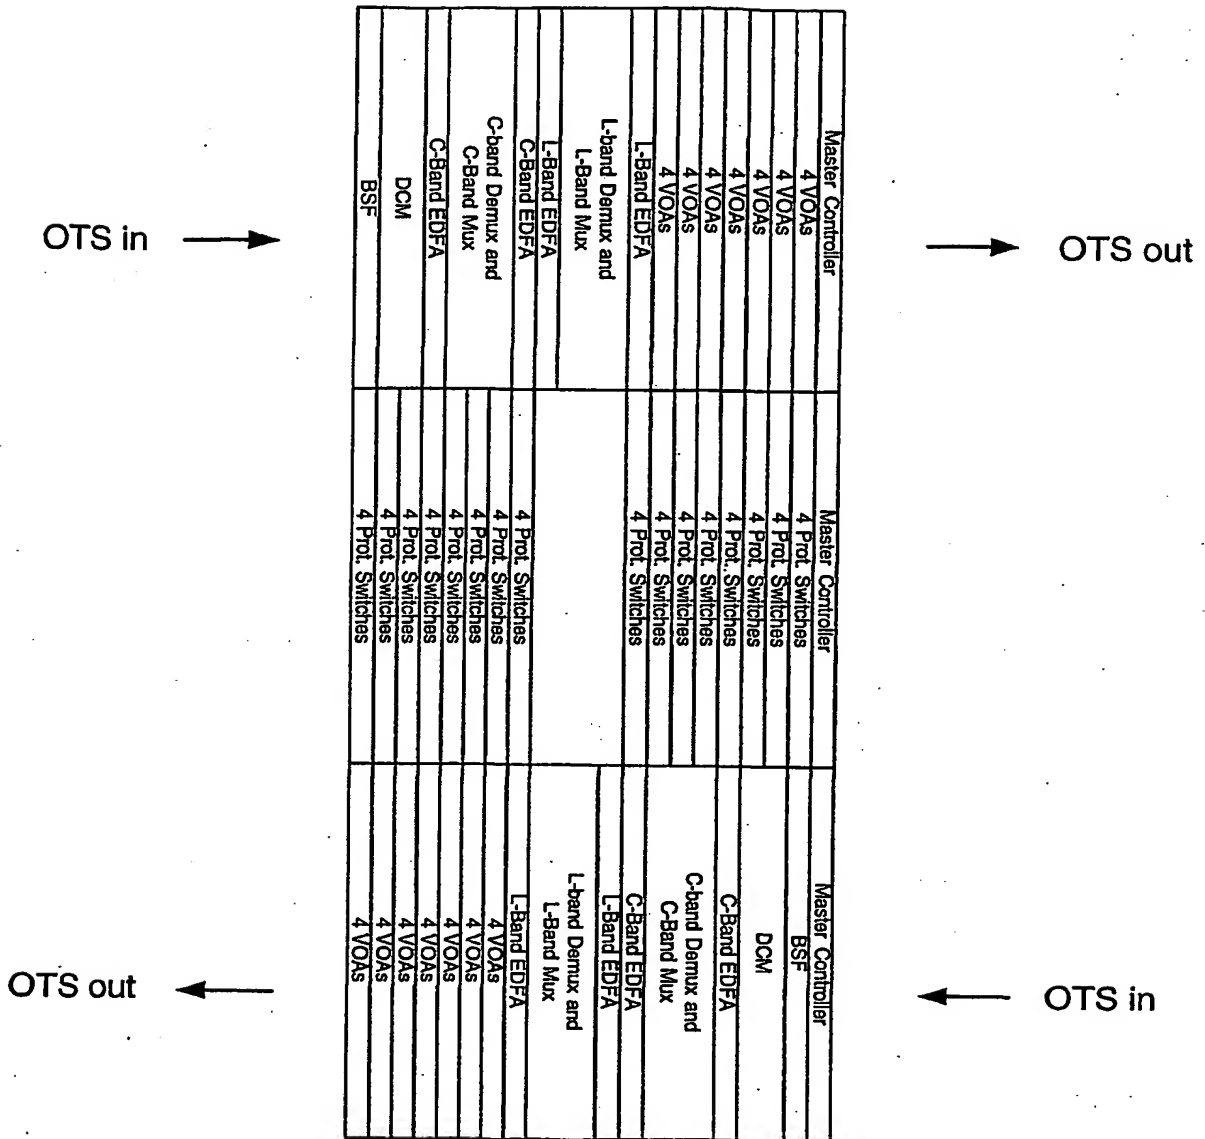


Figure 3

3/23

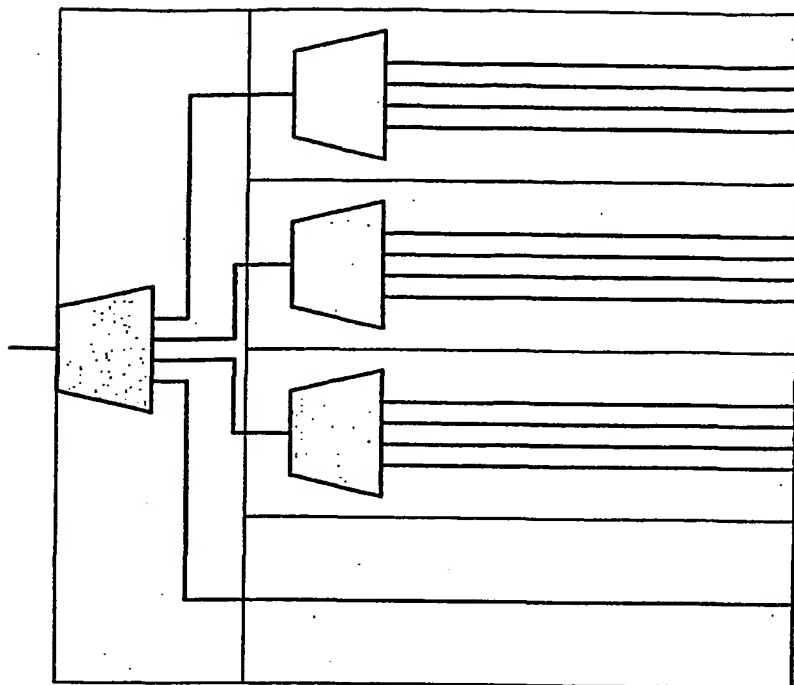


Figure 4


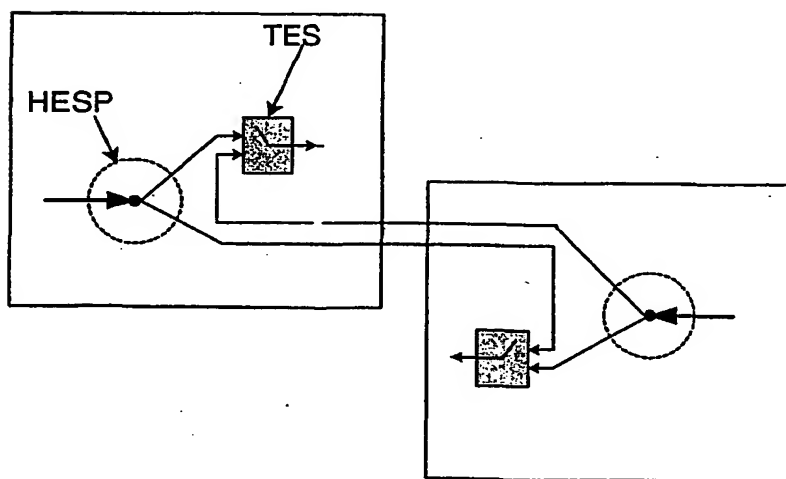


Figure 5

4/23

**Figure 6**

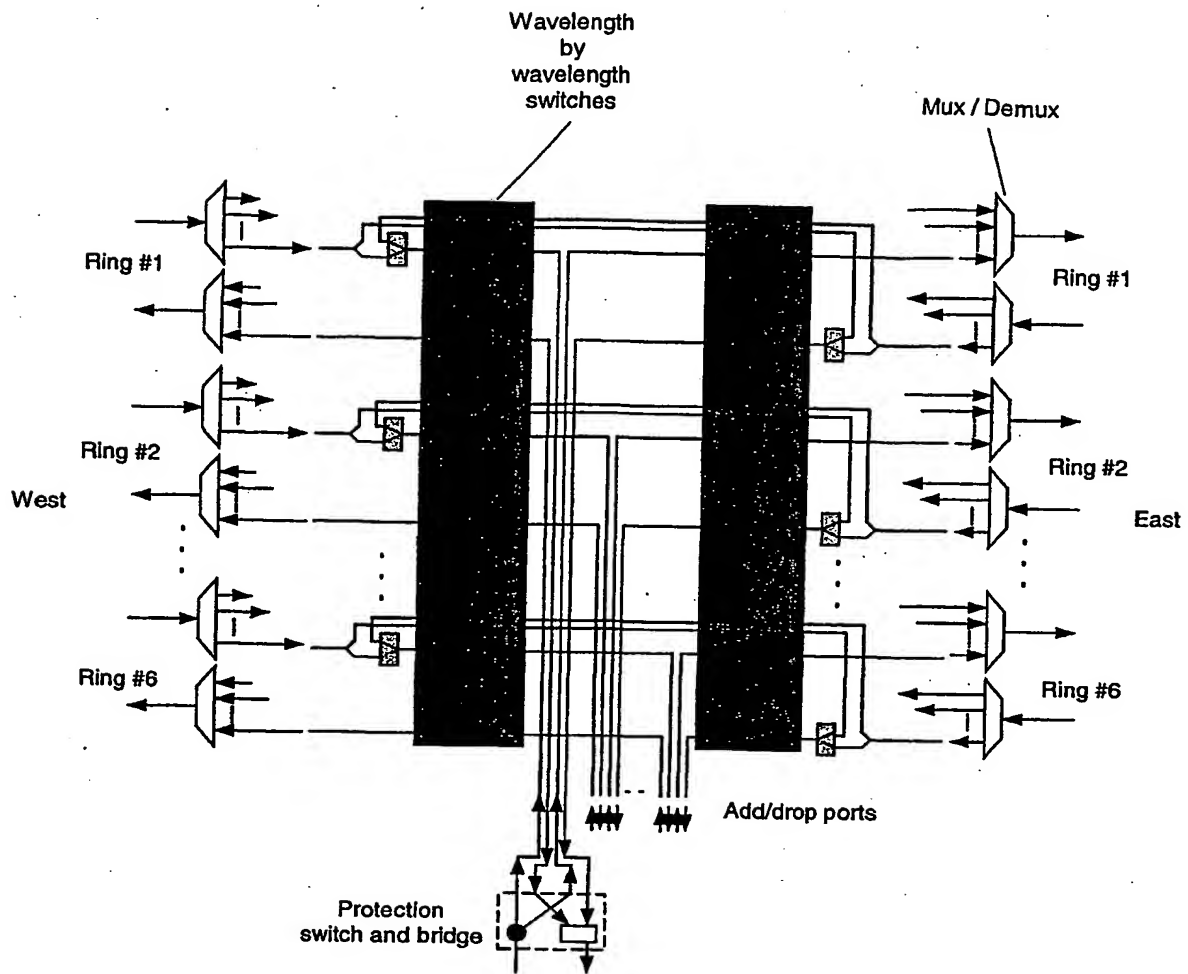

5/23

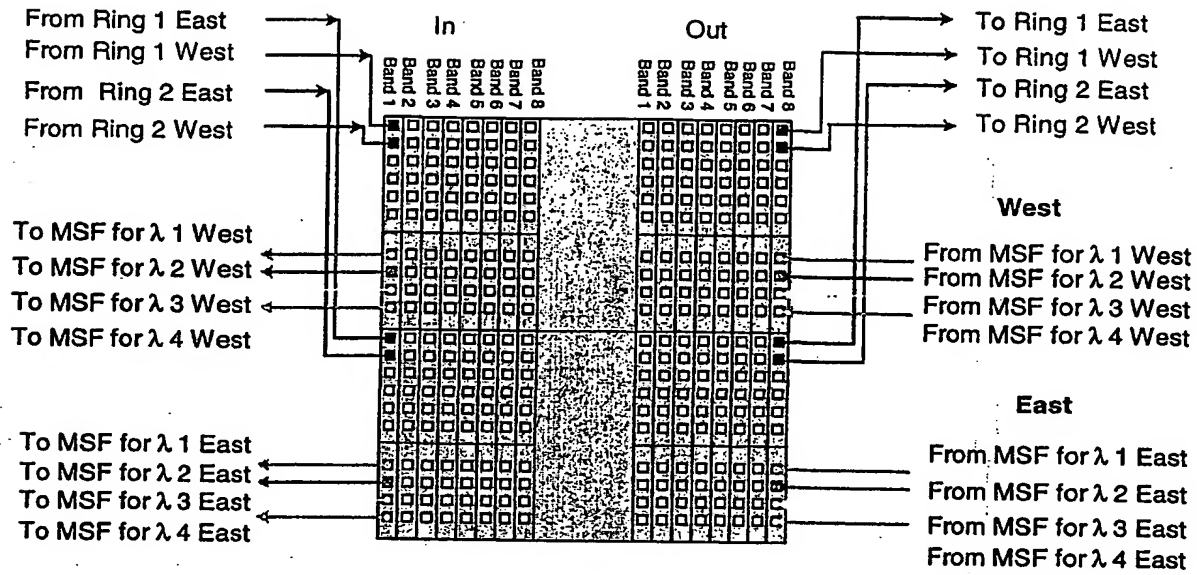


Figure 7

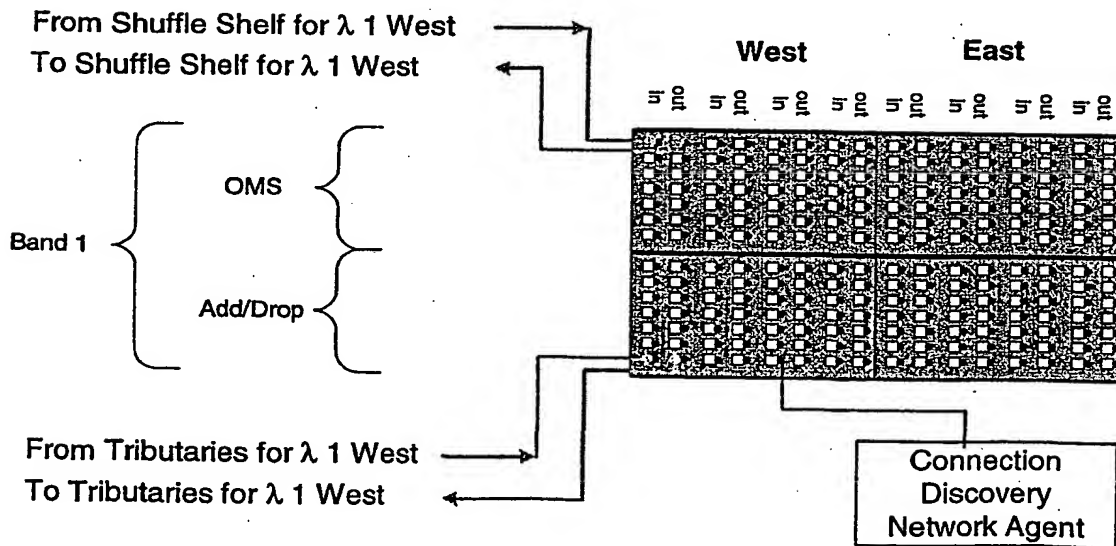


Figure 8

6/23

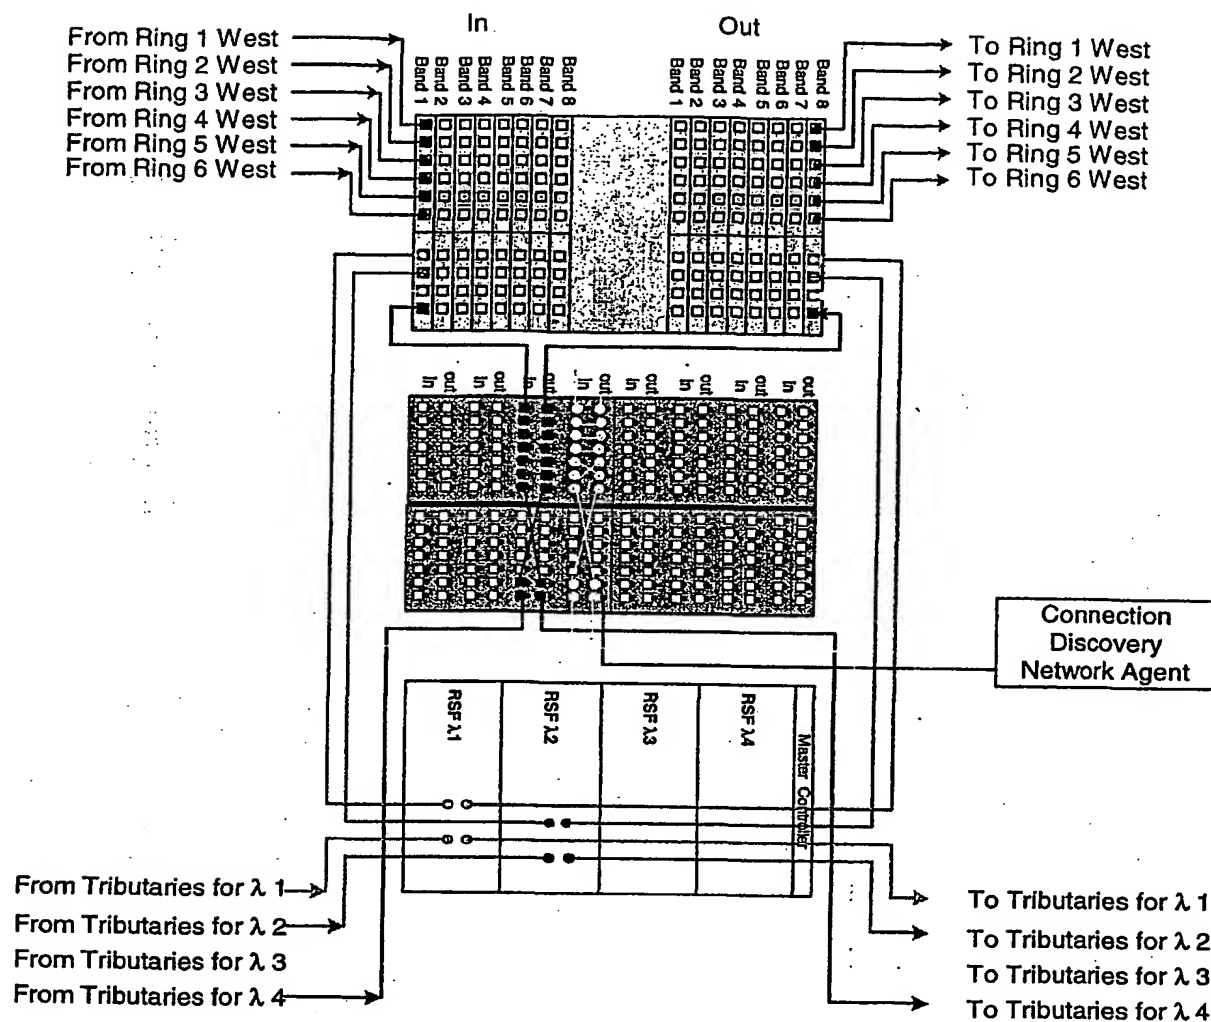
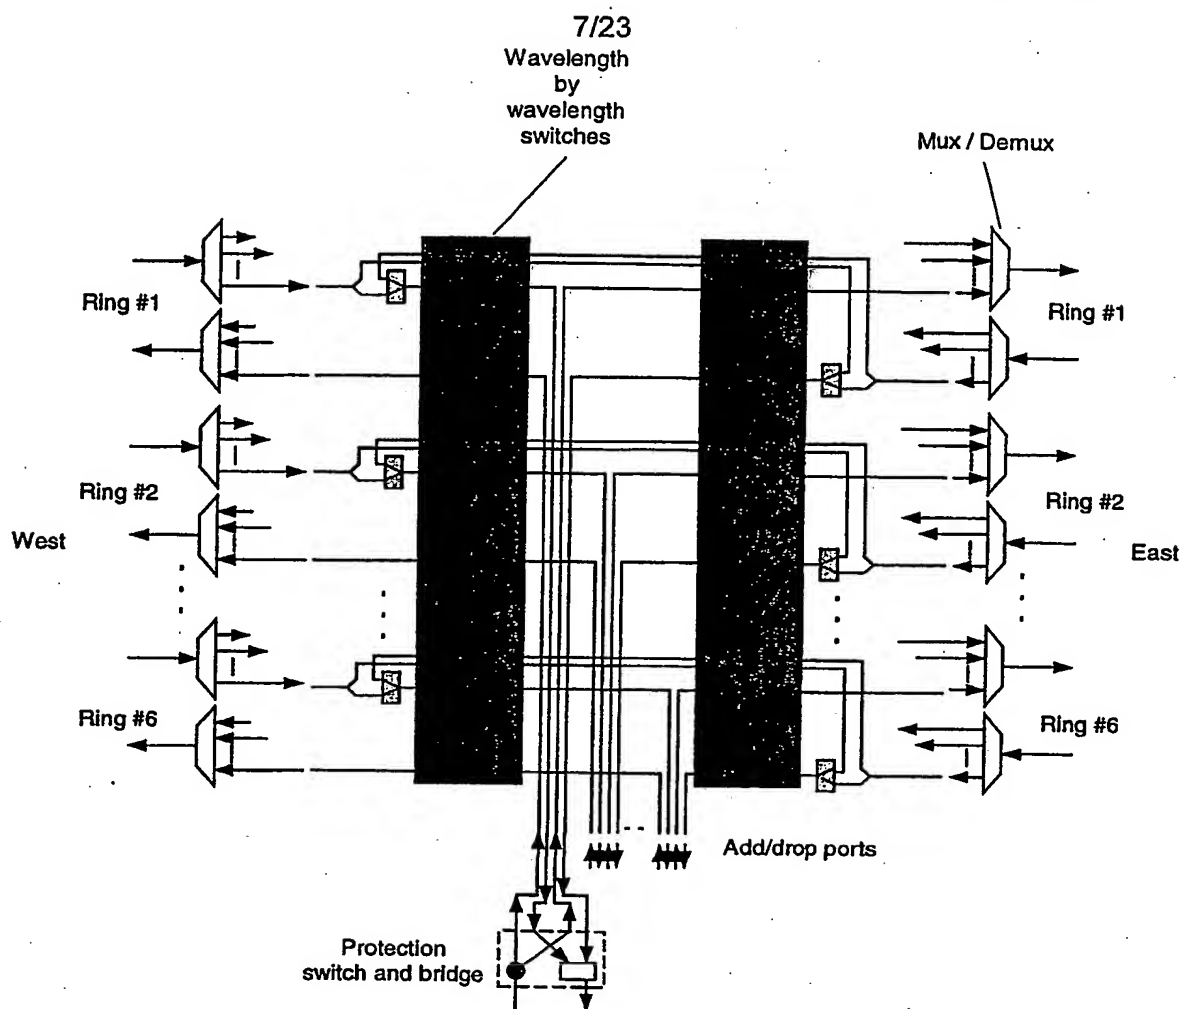


Figure 9

**Figure 10**

8/23

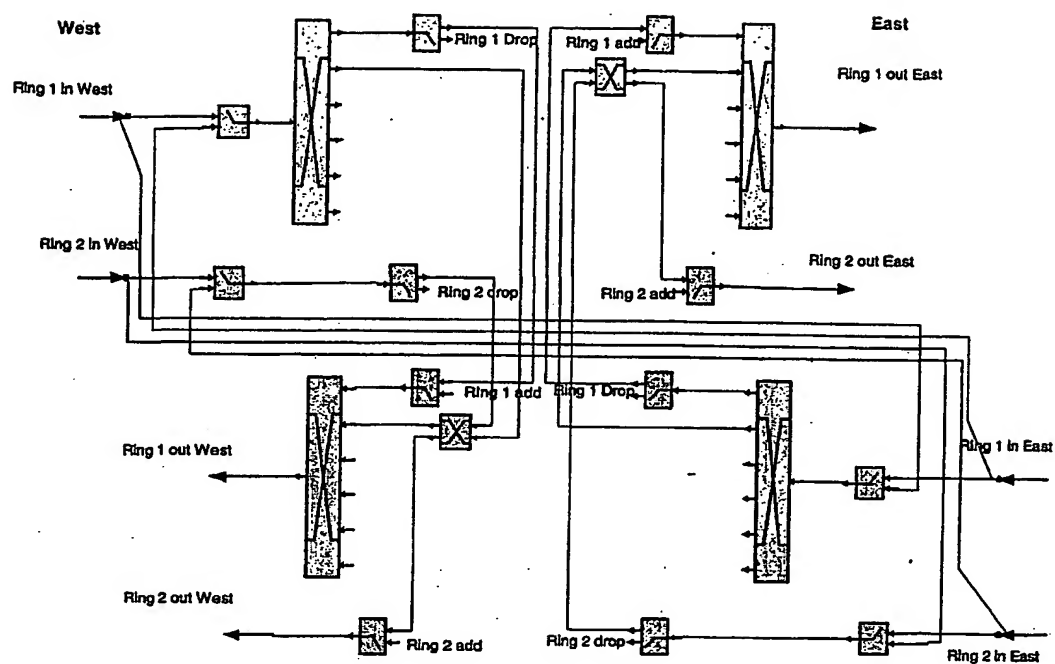


Figure 11

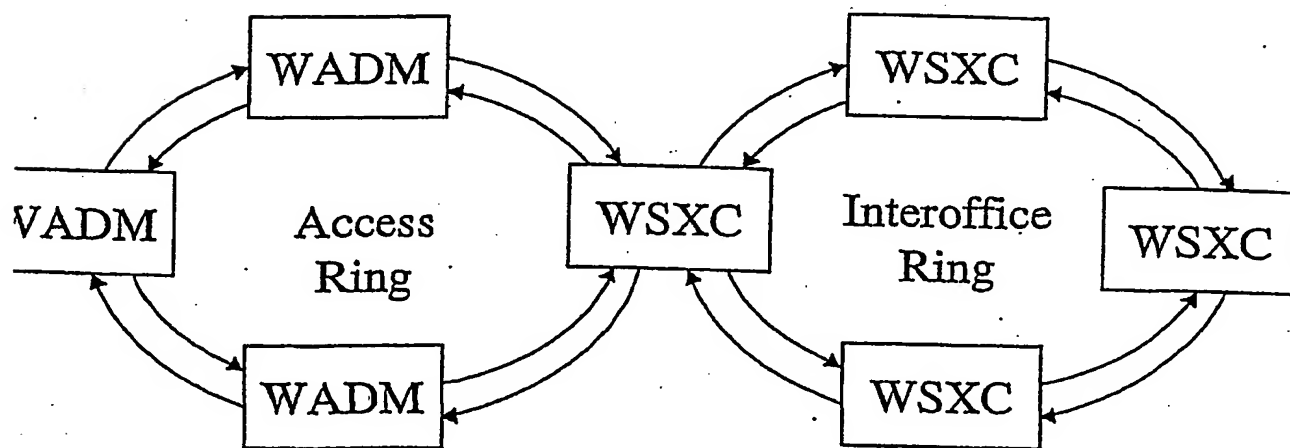




Figure 12

 OSC Transmitter  
 OSC Receiver

9/23

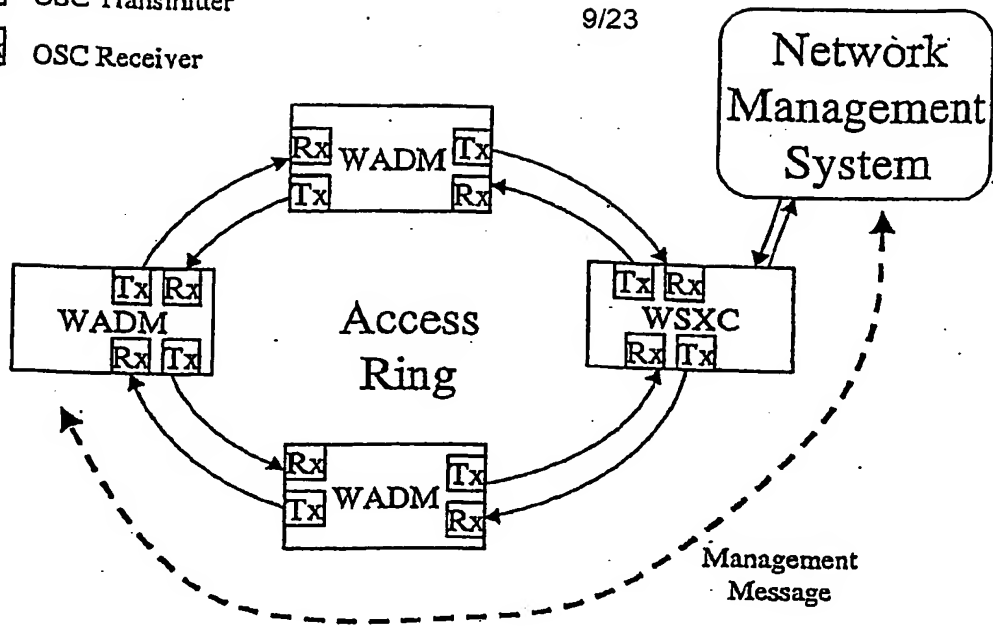


Figure 13

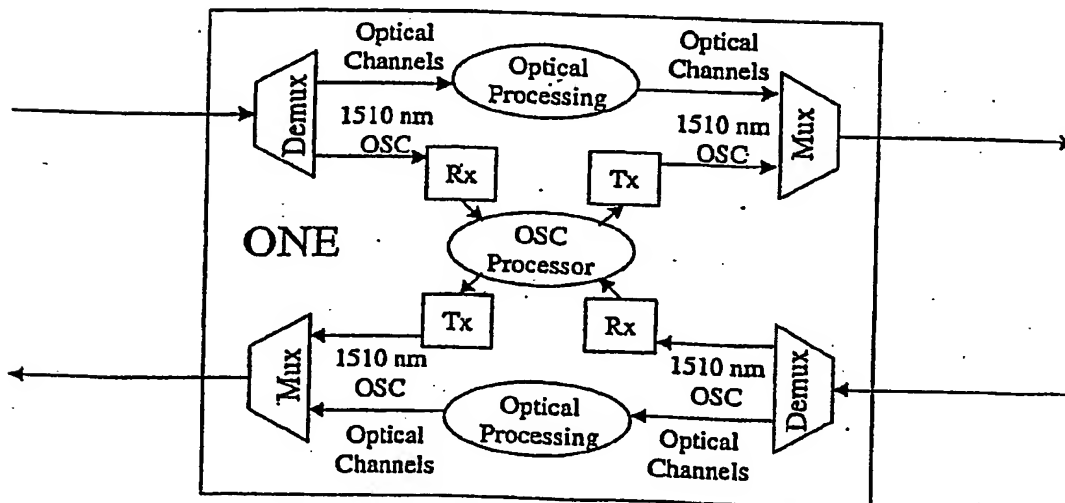


Figure 14

10/23

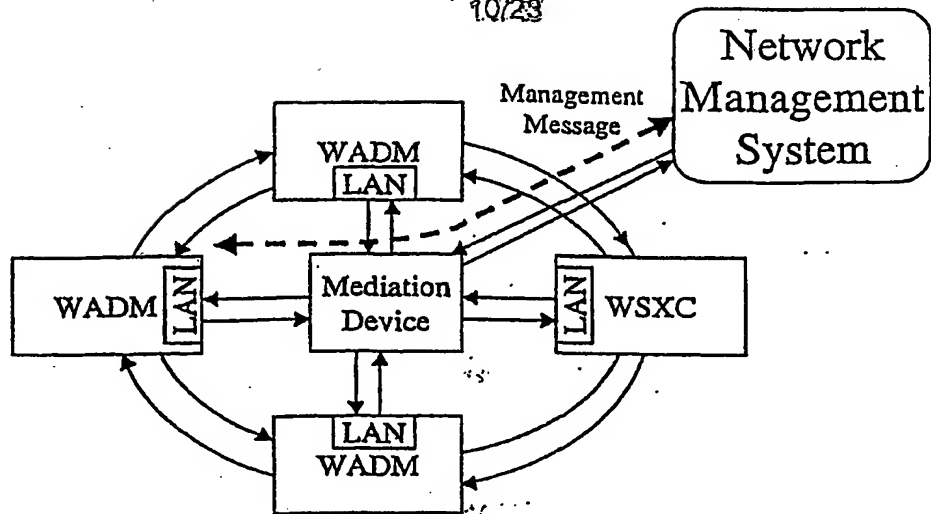


Figure 15

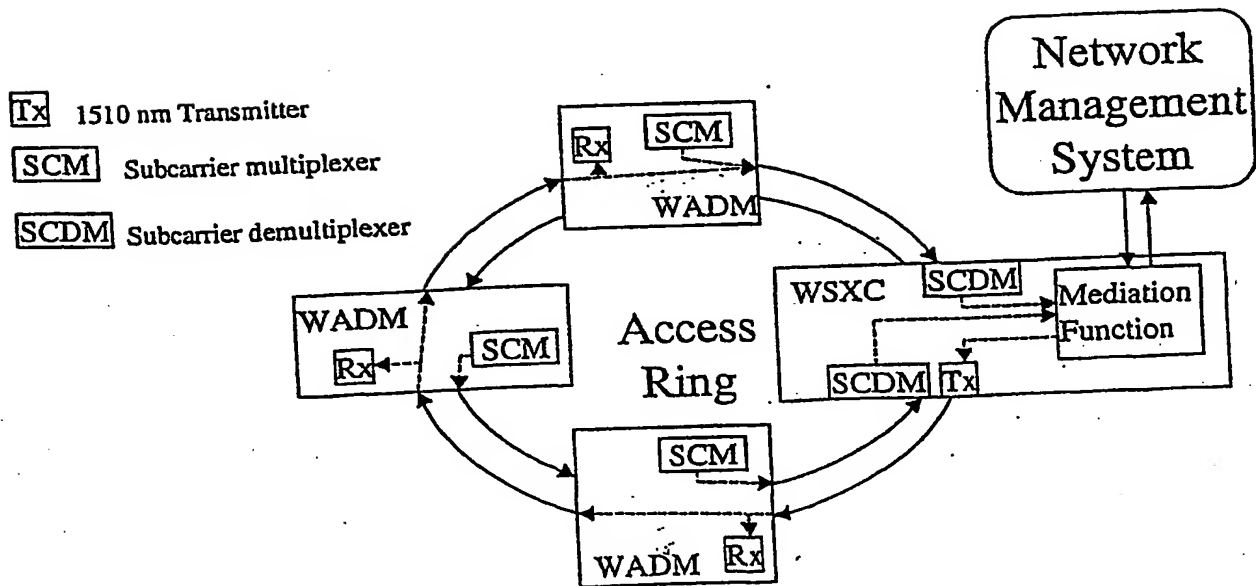


Figure 16

11/23

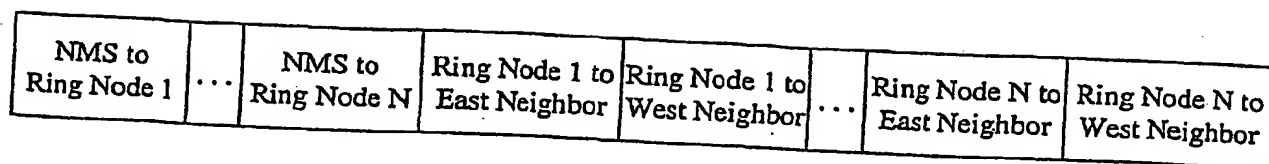


Figure 17

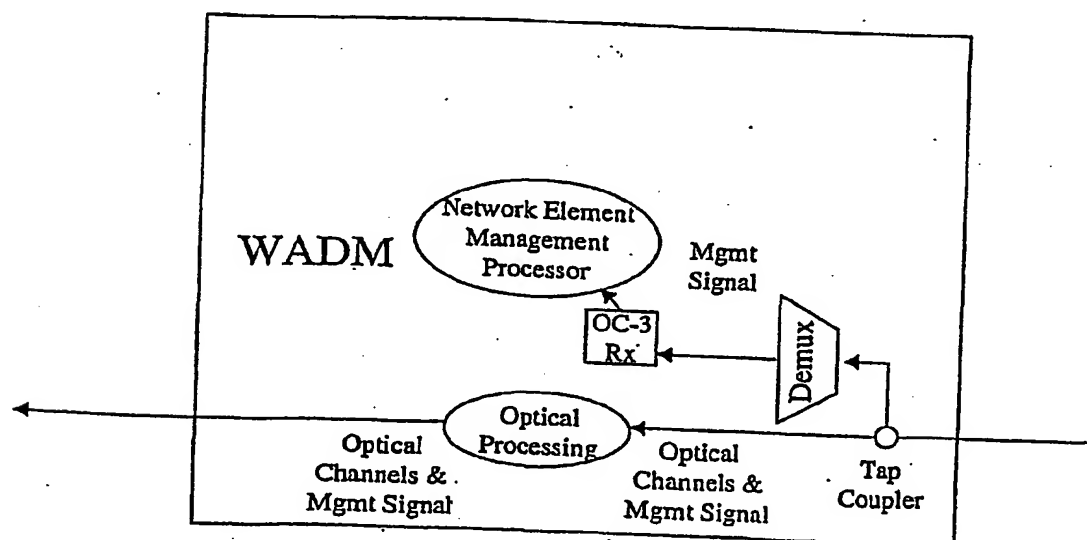


Figure 18

12/23

Ring Node J to East Neighbor	Ring Node J to West Neighbor	Ring Node J to NMS
---------------------------------	---------------------------------	-----------------------

Figure 19

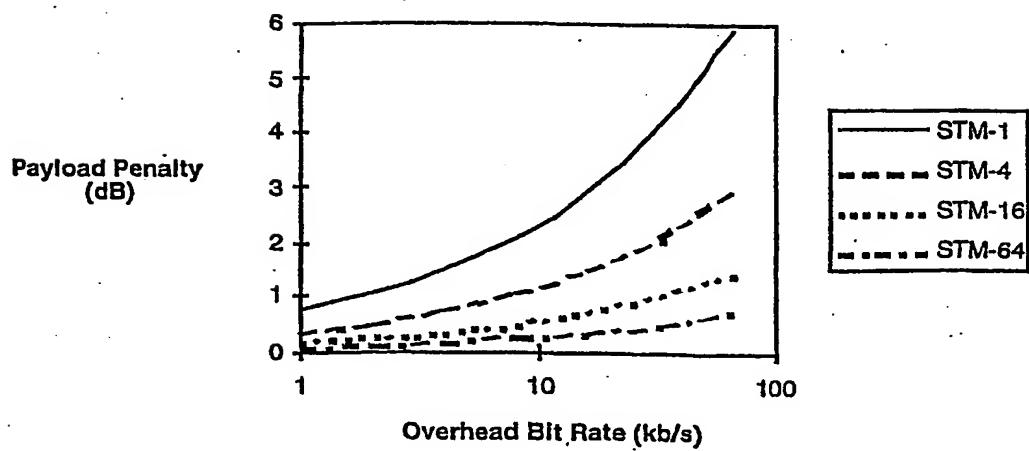


Figure 20



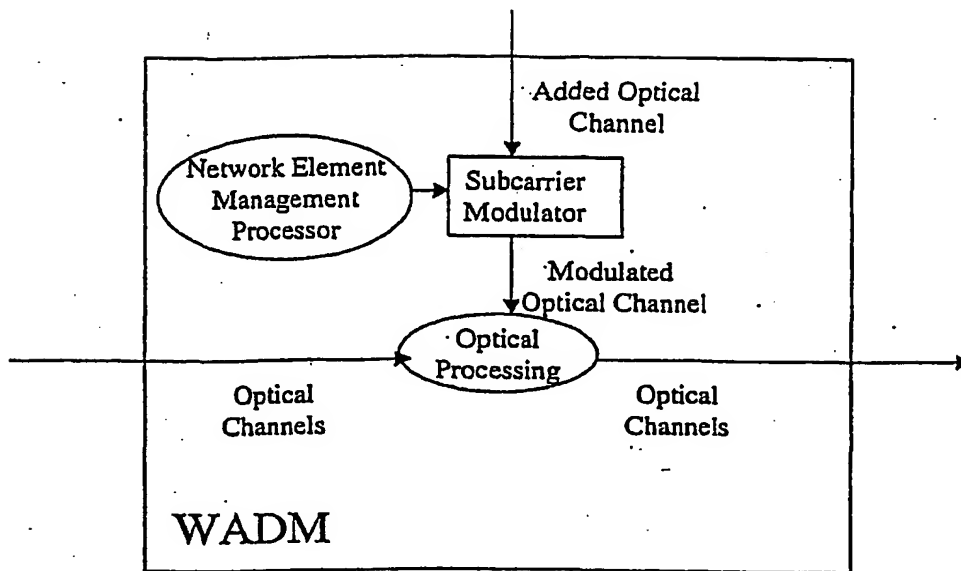


Figure 21



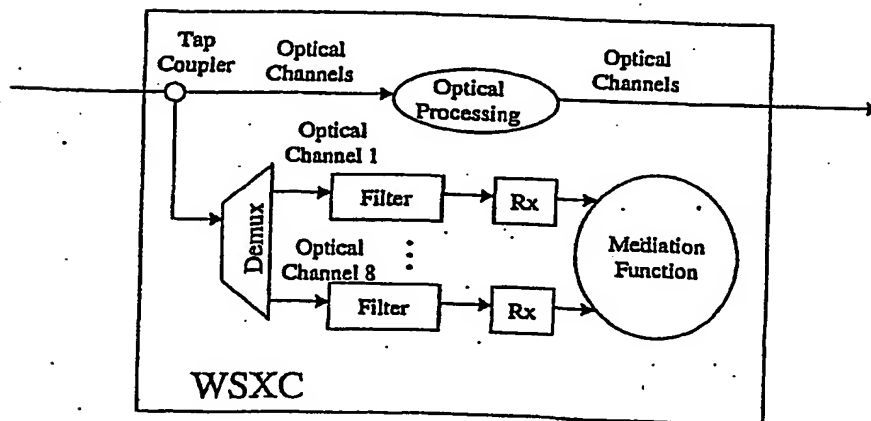


Figure 22

14/23

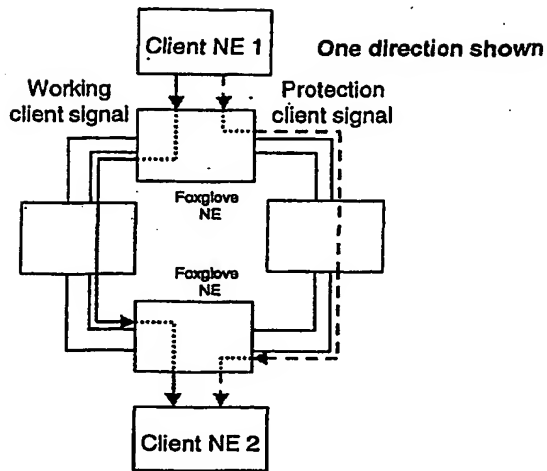

A

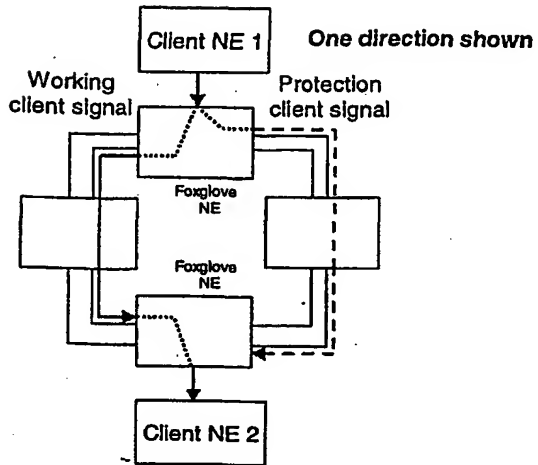

B

Figure 23

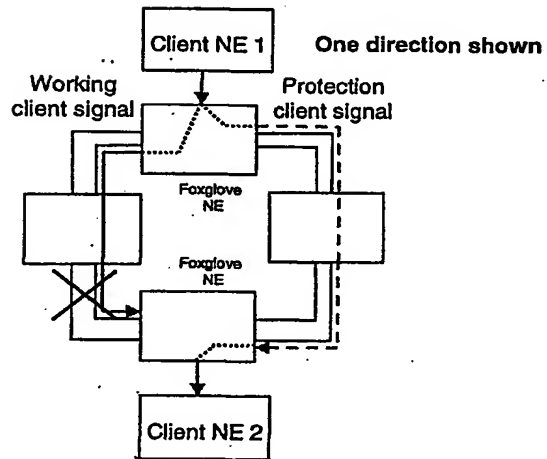
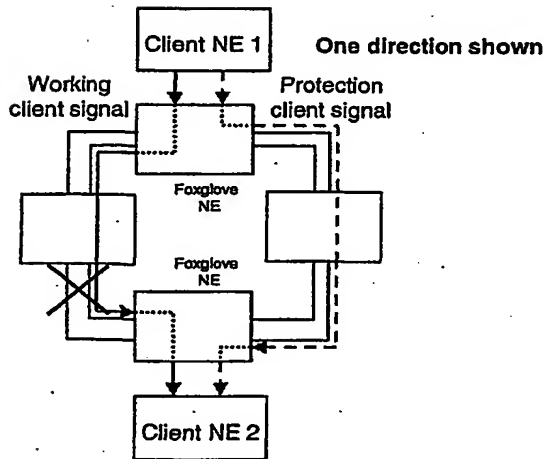


Figure 24

15/23

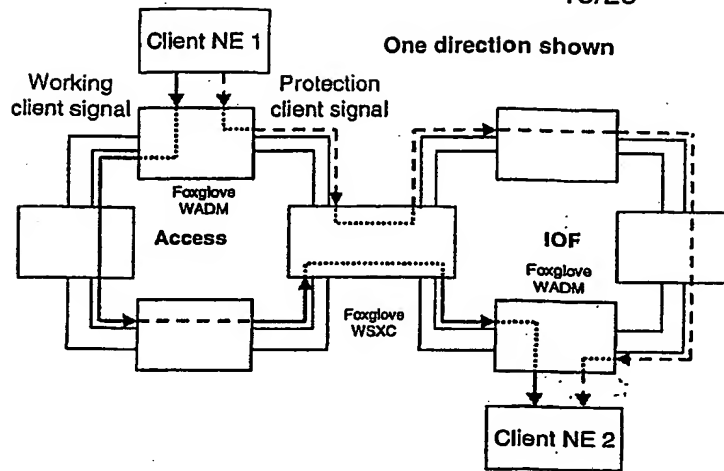


Figure 25

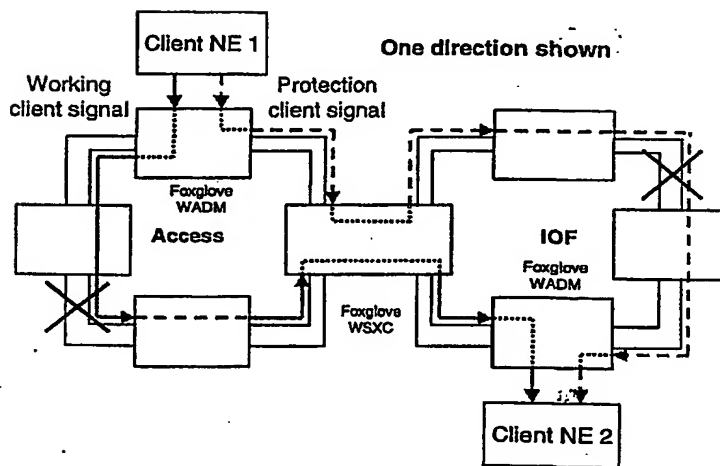
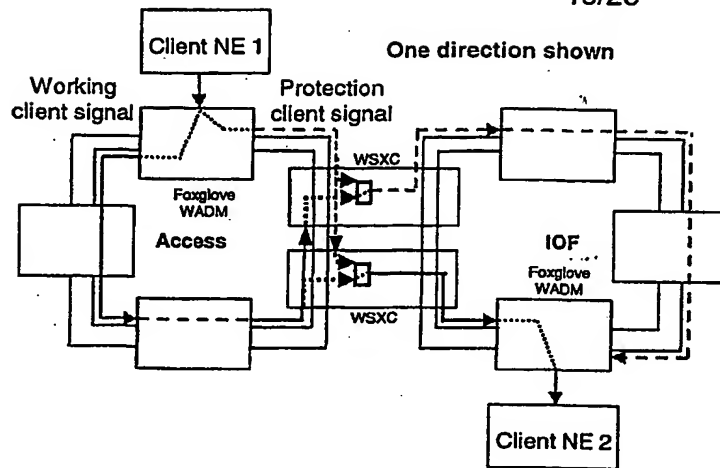
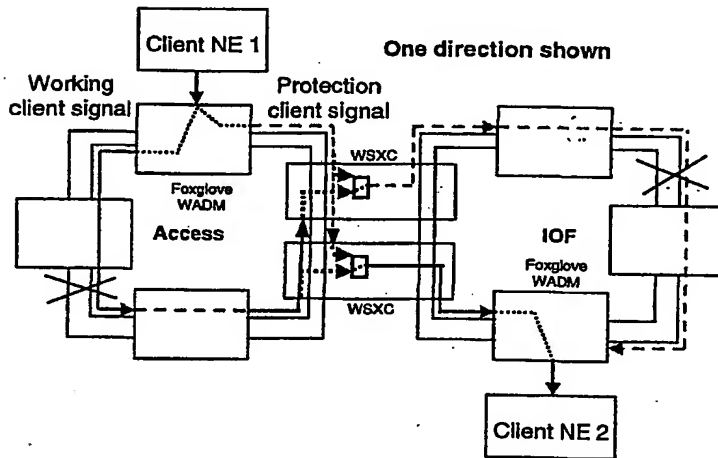


Figure 26

**Figure 27 (Prior Art)****Figure 28 (Prior Art)**

17/23

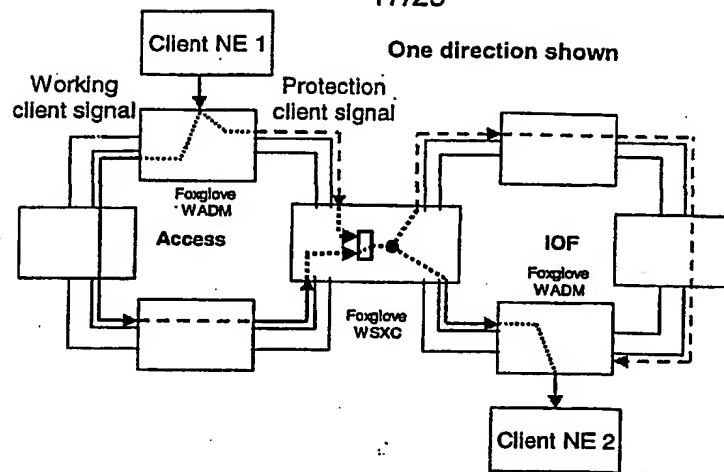


Figure 29

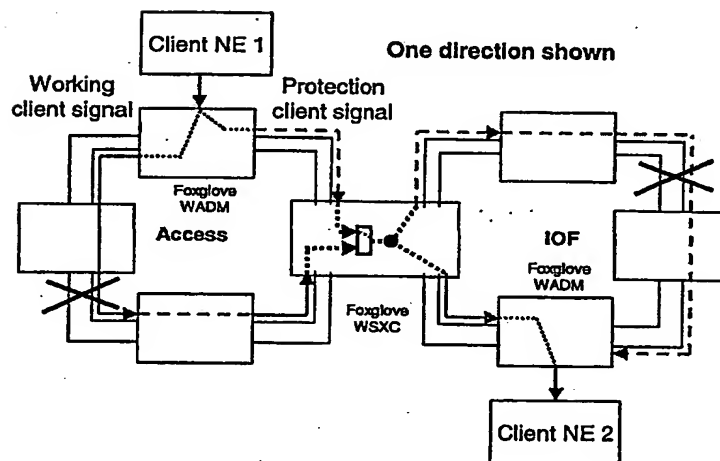
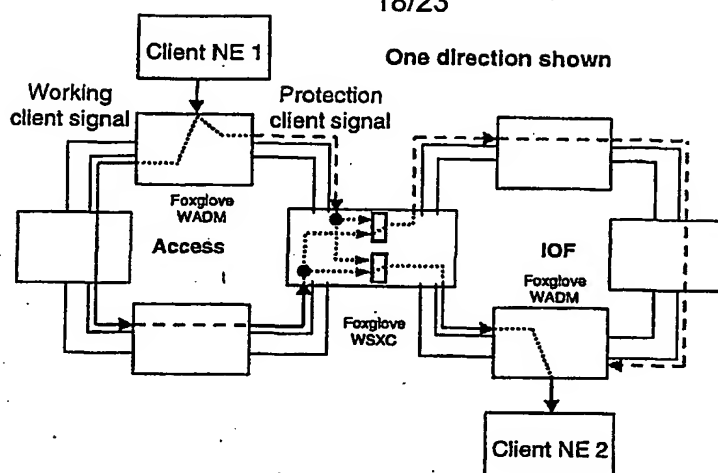
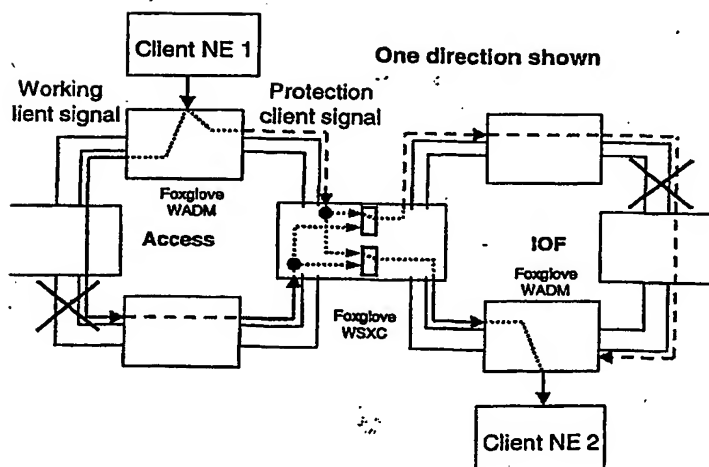
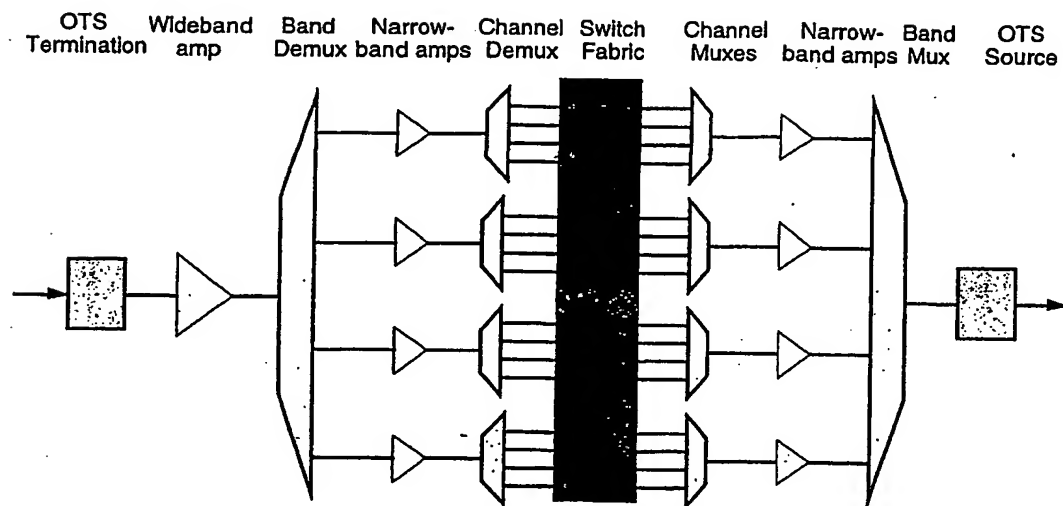


Figure 30

18/23

**Figure 31****Figure 32**

**Figure 33**

20/23

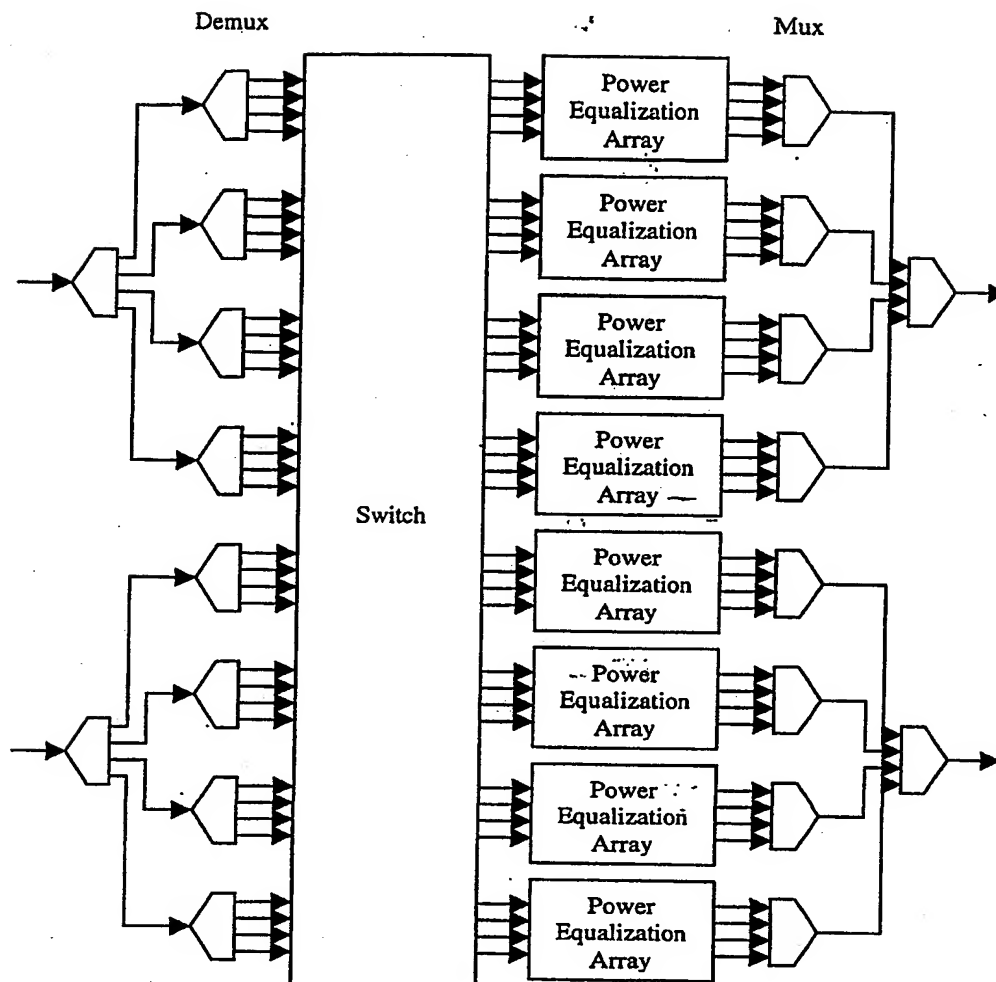


Figure 34



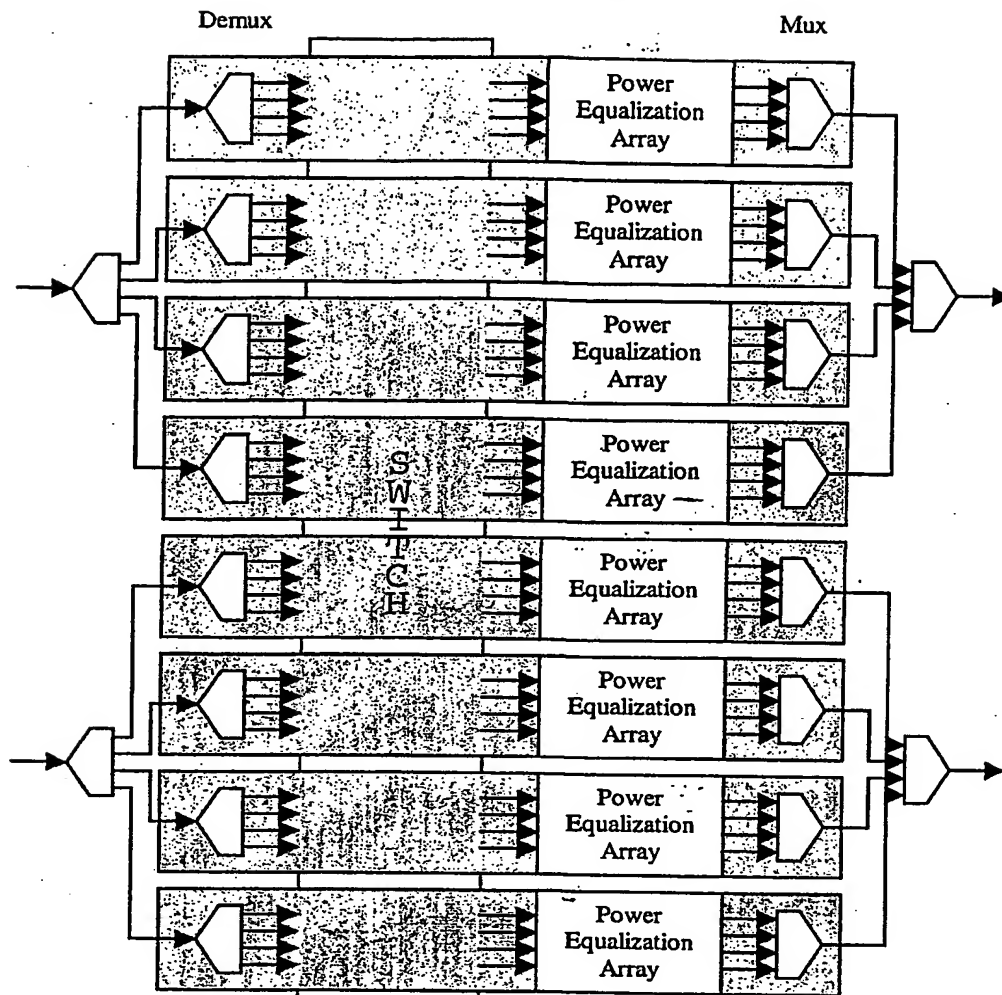


Figure 35

22/23



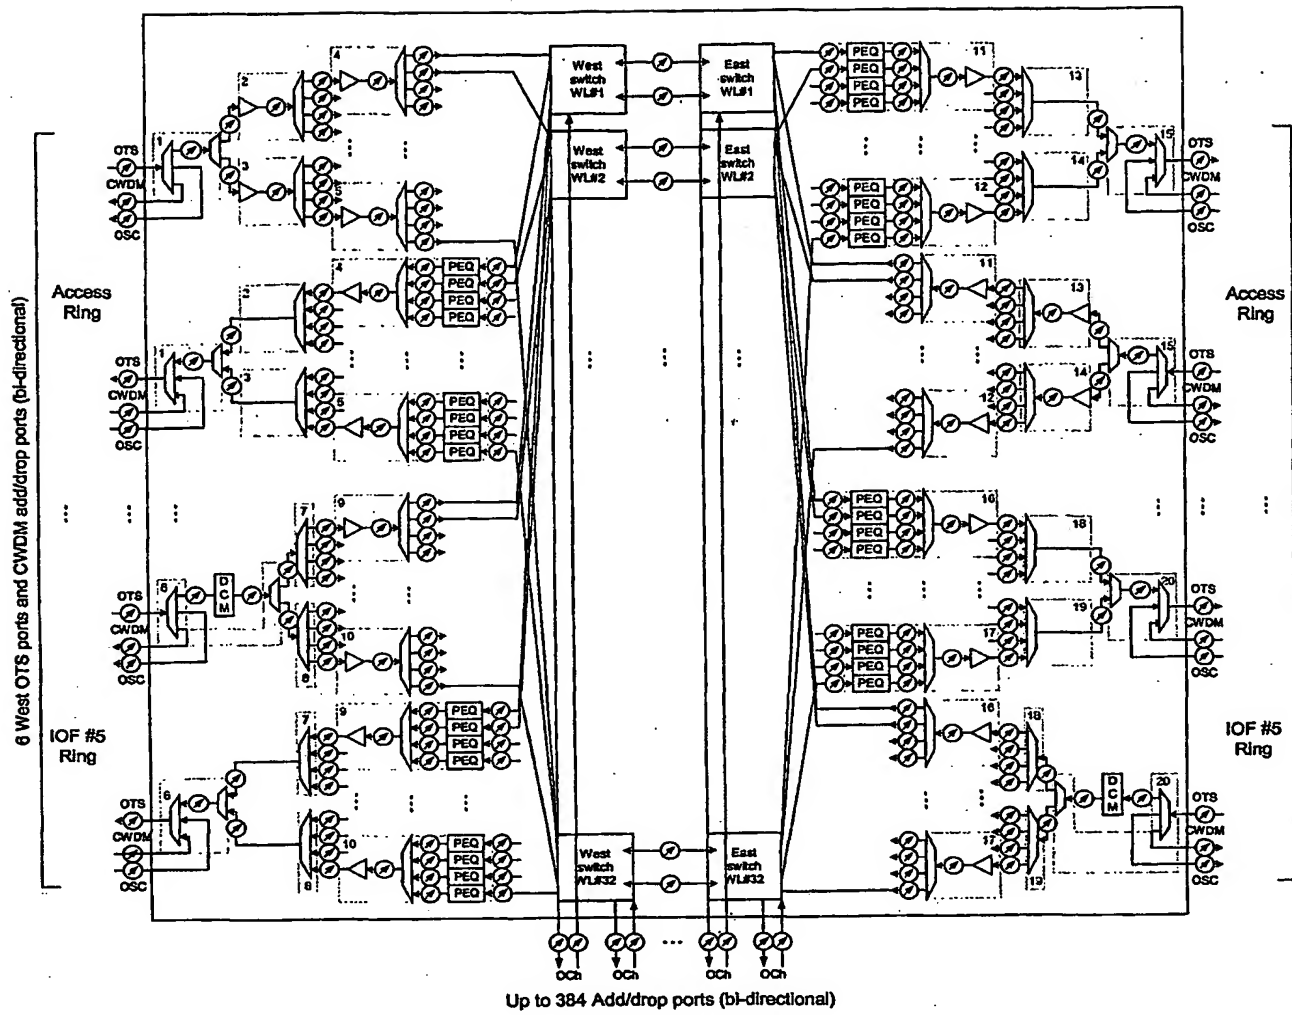


Figure 36

23/23

**Figure 37****Figure 38**

(19) World Intellectual Property Organization  
International Bureau

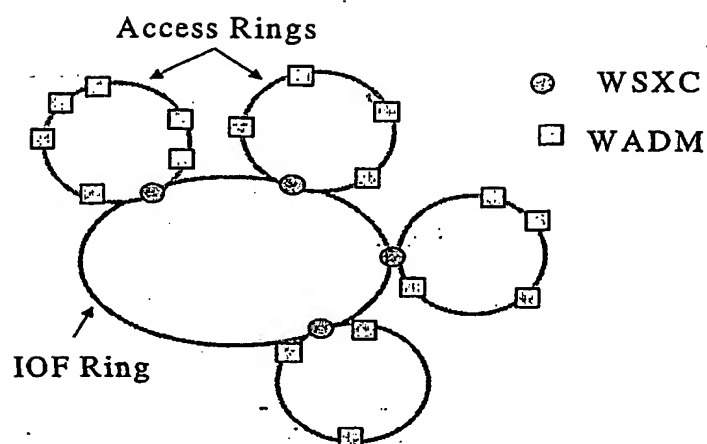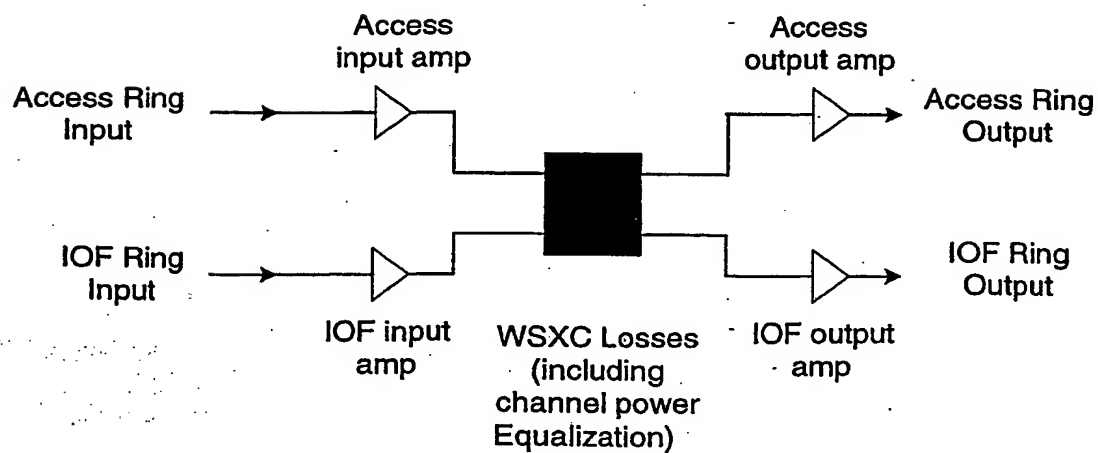

(43) International Publication Date  
22 November 2001 (22.11.2001)

PCT

(10) International Publication Number  
WO 01/089127 A3

(51) International Patent Classification<sup>7</sup>: H04Q 11/00

(21) International Application Number: PCT/US01/15769

(22) International Filing Date: 15 May 2001 (15.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/204,165 15 May 2000 (15.05.2000) US

(71) Applicant: CORNING INCORPORATED [US/US]; 1  
Riverfront Plaza, Corning, NY 14831 (US).

(72) Inventors: ANTONIADES, Neophytos; 416 Hillside  
Avenue, Leonia, NJ 07605 (US). BOSKOVIC, Alek-  
sandra; 90 Forest Glen Drive, Highland Park, NJ 08904  
(US). BUCKLAND, Eric, L.; 112 Mariners Point Lane,  
Hickory, NC 28601 (US). BUTLER, Douglas, L.; 25  
Katie Lane, Painted Post, NY 14870 (US). LI, Ming-Jun;

10 Ambrose Drive, Horseheads, NY 14845 (US). MCNA-  
MARA, Thomas, W.; 400 West Third Street, Corning,  
NY 14830 (US). PASTEL, David, A.; 623 Hibbard Road,  
Horseheads, NY 14845 (US). SHARMA, Manish; 13  
Petunia Drive, Apt. #2H, North Brunswick, NJ 08902  
(US). SOULLIERE, Mark, J.; 276 Wall Street, Corning,  
NY 14830 (US). YADLOWSKY, Michael, J.; 19 East  
Fifth Street, Corning, NY 14830 (US).


(74) Agent: BEAN, Gregory, V.; Corning Incorporated, SP TI  
3 - 1, Corning, NY 14831 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

[Continued on next page]

(54) Title: OPTICAL NETWORKING DEVICES AND METHODS FOR OPTICAL NETWORKS WITH INCREASED TRANS-  
PARENCY

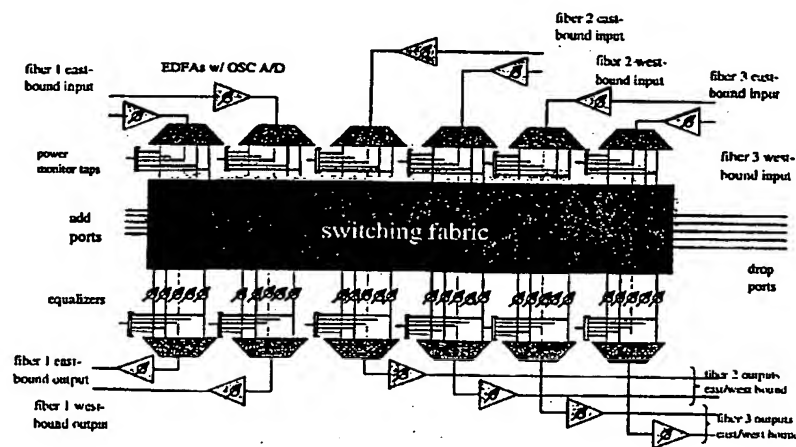

(57) Abstract: A wavelength selective optical cross-connect includes a first demultiplexor feeding into individually removable modules that in turn feed a first multiplexor, such that the cross-connect is expandable and repairable on a wavelength or waveband basis. The modules desirably include multiple optical components in the optical path, with components in each module matched to others in that module to provide module-to-module variation below that of the variation in module components. The modules desirably include an additional demultiplexor and multiplexor. The modules also desirably include wavelength or narrowband amplification together with power equalization. The modules may also include a switch fabric. Alternatively, the switch fabric may be provided in the form of a separate removable switch module or modules, with various technologies employed in various switch modules, including manual switching with automatic connection discovery, with simple plug-in upgradeability to modules having automatic or remotely actuated switching.

WO 01/089127 A3



**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

24 July 2003

## INTERNATIONAL SEARCH REPORT

Internal application No

PCT/US 01/15769

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04Q11/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04Q 602B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JINNO M ET AL: "ULTRA-WIDE-BAND WDM NETWORKS AND SUPPORTING TECHNOLOGIES" PROCEEDINGS OF THE EUROPEAN CONFERENCE ON NETWORKS AND OPTICAL COMMUNICATIONS 1999. NOC'99. CORE NETWORKS AND NETWORK MANAGEMENT, AMSTERDAM: IOS PRESS, NL, vol. PART 2, 1999, pages 90-97, XP000829416 ISBN: 90-5199-497-4	1-3
Y		4-9, 11-13, 17-19 14-16
A	page 94, paragraph 3 -page 96, last line -/-	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 21 January 2003		Date of mailing of the international search report 21. 05. 2003
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Meurisse, W

Form PCT/ISA/210 (second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

Internal Application No  
PCT/US 01/15769

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	YOSHIZAWA N ET AL: "RECONFIGURABLE OPTICAL ADD/DROP MULTIPLEXER FOR 32CHANNEL DENSE WAVELENGTH DIVISION MULTIPLEXING SYSTEMS" PROCEEDINGS OF THE EUROPEAN CONFERENCE ON NETWORKS AND OPTICAL COMMUNICATIONS 1999. NOC'99. BROADBAND ACCESS AND TECHNOLOGY, AMSTERDAM: IOS PRESS, NL, vol. PART 1, 1999, pages 301-307, XP000829401 ISBN: 90-5199-496-6 figure 2	4-9, 11-13, 17-19
A	HARADA K ET AL: "OPTICAL PATH CROSS-CONNECT SYSTEM USING MATRIX WAVELENGTH DIVISION MULTIPLEX SCHEME" IEICE TRANSACTIONS ON COMMUNICATIONS, INSTITUTE OF ELECTRONICS INFORMATION AND COMM. ENG. TOKYO, JP, vol. E82-B, no. 2, February 1999 (1999-02), pages 344-347, XP000940185 ISSN: 0916-8516 page 345, left-hand column, paragraph 3 -right-hand column, last line	1-9, 11-19
A	HARADA K ET AL: "HIERARCHICAL OPTICAL PATH CROSS-CONNECT SYSTEMS FOR LARGE SCALE WDMNETWORKS" OFC/IOOC '99 OPTICAL FIBER COMMUNICATION CONFERENCE / INTERNATIONAL CONFERENCE ON INTEGRATED OPTICS AND OPTICAL FIBER COMMUNICATION. SAN DIEGO, CA, FEB. 21 - 26, 1999, OPTICAL FIBER COMMUNICATION CONFERENCE / INTERNATIONAL CONFERENCE ON INTEGRATED OP, 21 February 1999 (1999-02-21), pages WM55-1-WM55-3, XP000966974 ISBN: 0-7803-5430-3 the whole document	1-9, 11-19
A	KUZNETSOV M ET AL: "A NEXT-GENERATION OPTICAL REGIONAL ACCESS NETWORK" IEEE COMMUNICATIONS MAGAZINE, IEEE SERVICE CENTER. PISCATAWAY, N.J, US, vol. 38, no. 1, January 2000 (2000-01), pages 66-72, XP000908339 ISSN: 0163-6804 figure 5	1-9, 11-19

-/-

## INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 01/15769

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WILLNER A E: "TOWARDS UNIFORM CHANNEL PERFORMANCE IN DYNAMIC WDM SYSTEMS AND NETWORKS" OFC/IOOC '99 OPTICAL FIBER COMMUNICATION CONFERENCE / INTERNATIONAL CONFERENCE ON INTEGRATED OPTICS AND OPTICAL FIBER COMMUNICATION. SAN DIEGO, CA, FEB. 21 - 26, 1999, OPTICAL FIBER COMMUNICATION CONFERENCE / INTERNATIONAL CONFERENCE ON INTEGRATED OP, 21 February 1999 (1999-02-21), pages TH05-1-TH05-3, XP000967036 ISBN: 0-7803-5430-3 the whole document	1-9, 11-19
A	US 5 774 245 A (BAKER PHILLIP E) 30 June 1998 (1998-06-30) figure 4	14-16
A	WO 00 04671 A (LAOR HERZEL) 27 January 2000 (2000-01-27) page 1, line 9 -page 3, line 18	14-16
A	US 5 394 503 A (DIETZ JR FREDERICK ET AL) 28 February 1995 (1995-02-28) column 3, line 7 - line 26	14-16
A	WO 99 67666 A (LAOR HERZEL ;ASTARTE FIBER NETWORKS INC (US)) 29 December 1999 (1999-12-29) page 4, line 23 -page 5, line 8	14-16



# INTERNATIONAL SEARCH REPORT

Inter. application No.  
PCT/US 01/15769

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-9, 11-19

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-9,11-19

Wavelength selective crossconnect device comprising a power equalization array

2. Claims: 21-37

Method and device for providing network management communication in an optical fiber network

3. Claims: 10,20,38,39

Device and method for providing protection switching in a wavelength selective optical cross-connect device

4. Claims: 40,41

Wavelength selective cross-connect device comprising a switch to selectively connect a first ring to a second ring.

5. Claims: 42,43

Wavelength selective cross-connect device comprising a wide band amplifier and a plurality of narrowband amplifiers.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/US 01/15769

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5774245	A	30-06-1998	WO 9741720 A2	13-11-1997
WO 0004671	A	27-01-2000	US 6002331 A	14-12-1999
			AU 5219399 A	07-02-2000
			CA 2335097 A1	27-01-2000
			CN 1315026 T	26-09-2001
			EP 1112557 A2	04-07-2001
			JP 2002521649 T	16-07-2002
			WO 0004671 A2	27-01-2000
US 5394503	A	28-02-1995	AU 680720 B2	07-08-1997
			AU 1511395 A	29-08-1995
			CA 2285337 A1	17-08-1995
			DE 69432360 D1	30-04-2003
			EP 0745229 A1	04-12-1996
			JP 9508980 T	09-09-1997
			WO 9522069 A1	17-08-1995
WO 9967666	A	29-12-1999	US 6101299 A	08-08-2000
			US 6097858 A	01-08-2000
			US 6097860 A	01-08-2000
			AU 6381599 A	10-01-2000
			BR 9910904 A	13-02-2001
			CA 2334279 A1	29-12-1999
			CN 1306630 T	01-08-2001
			EP 1110114 A1	27-06-2001
			JP 2002519710 T	02-07-2002
			WO 9967666 A1	29-12-1999
			US 6320993 B1	20-11-2001